


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

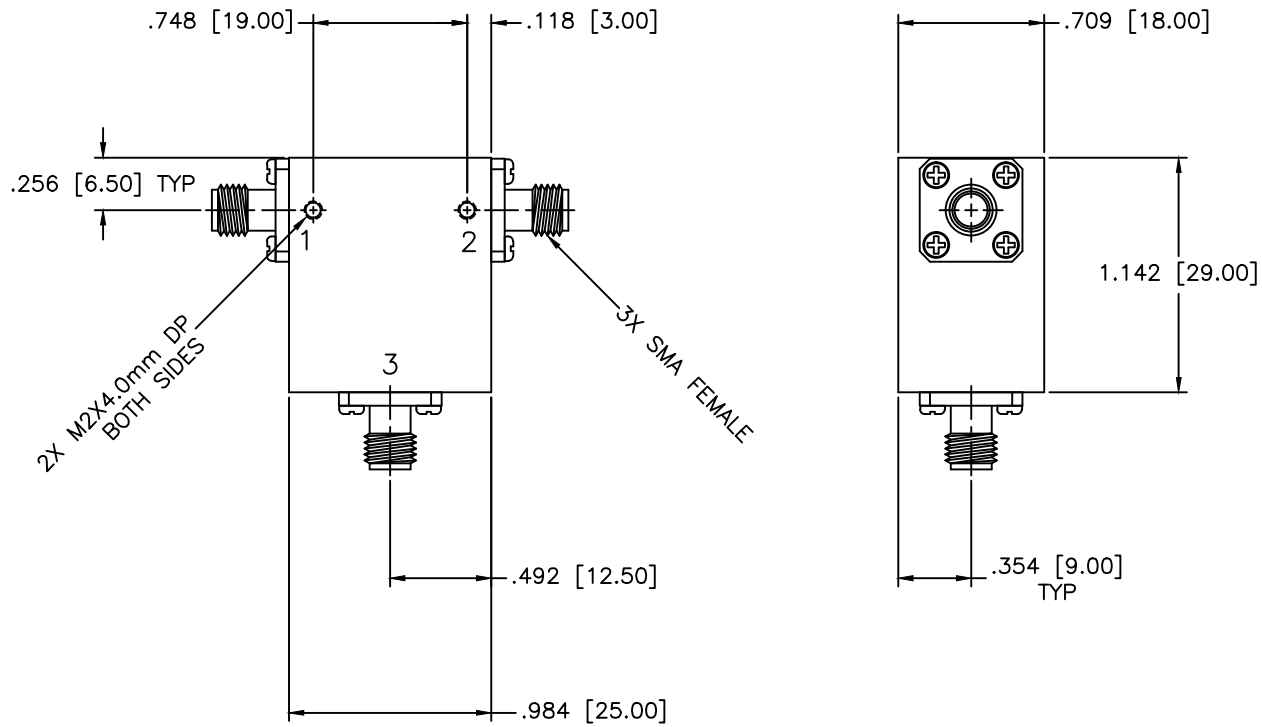

SPECIFICATIONS

Frequency Range: 5.2–5.9 GHz
 Isolation: 23dB Min.
 Insertion loss: 0.4dB Max.
 VSWR: 1.15:1 Max.
 Power: 25W Avg.
 Operating Temperature: –54°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR		
DRAWN: Paiboon		PART NO.: CS-338		
DATE: 10-07-2010		CAGE CODE: OD2L5		
APPROVED: Peter Nguyen		DATE: 10-27-2023		
<small>PROPRIETARY NOTING: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		SIZE: N/A	REV: N/A	DWG NO.: 85079
		DO NOT SCALE THE DRAWING		