


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

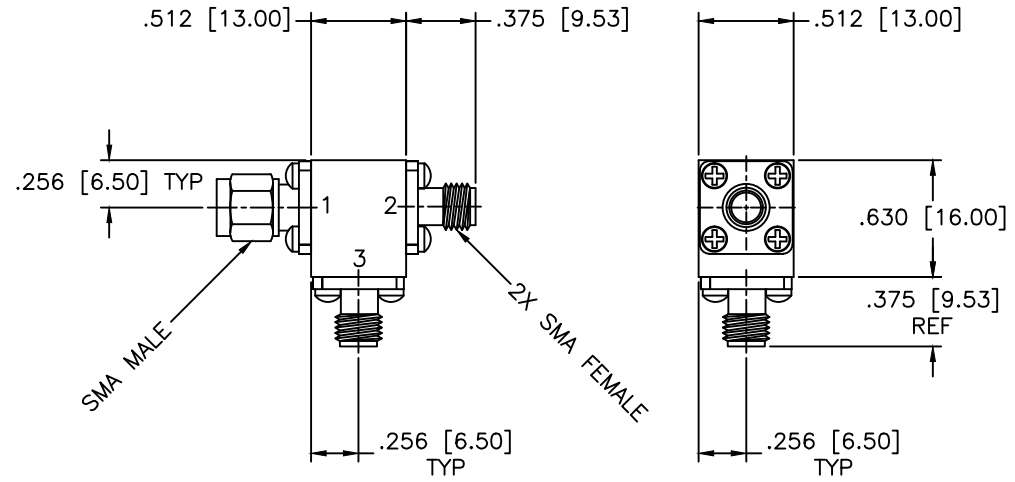

SPECIFICATIONS

Frequency Range: 12.4–18.0 GHz
 Isolation: 19dB Min.
 Insertion loss: 0.60dB Max.
 VSWR: 1.30:1 Max.
 Operating Temperature: –10°C to +60°C
 Power: 50W Avg, 100W Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.010 ANGLE: ±1/2°			DRAWING TITLE:		COAXIAL CIRCULATOR	
DRAWN:		PART NO.		CS-34/SMI		
DATE:		CAGE CODE:		SIZE:	REV:	DWG NO.
APPROVED:		OD2L5		N/A	A	84872
DATE:		THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		