


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

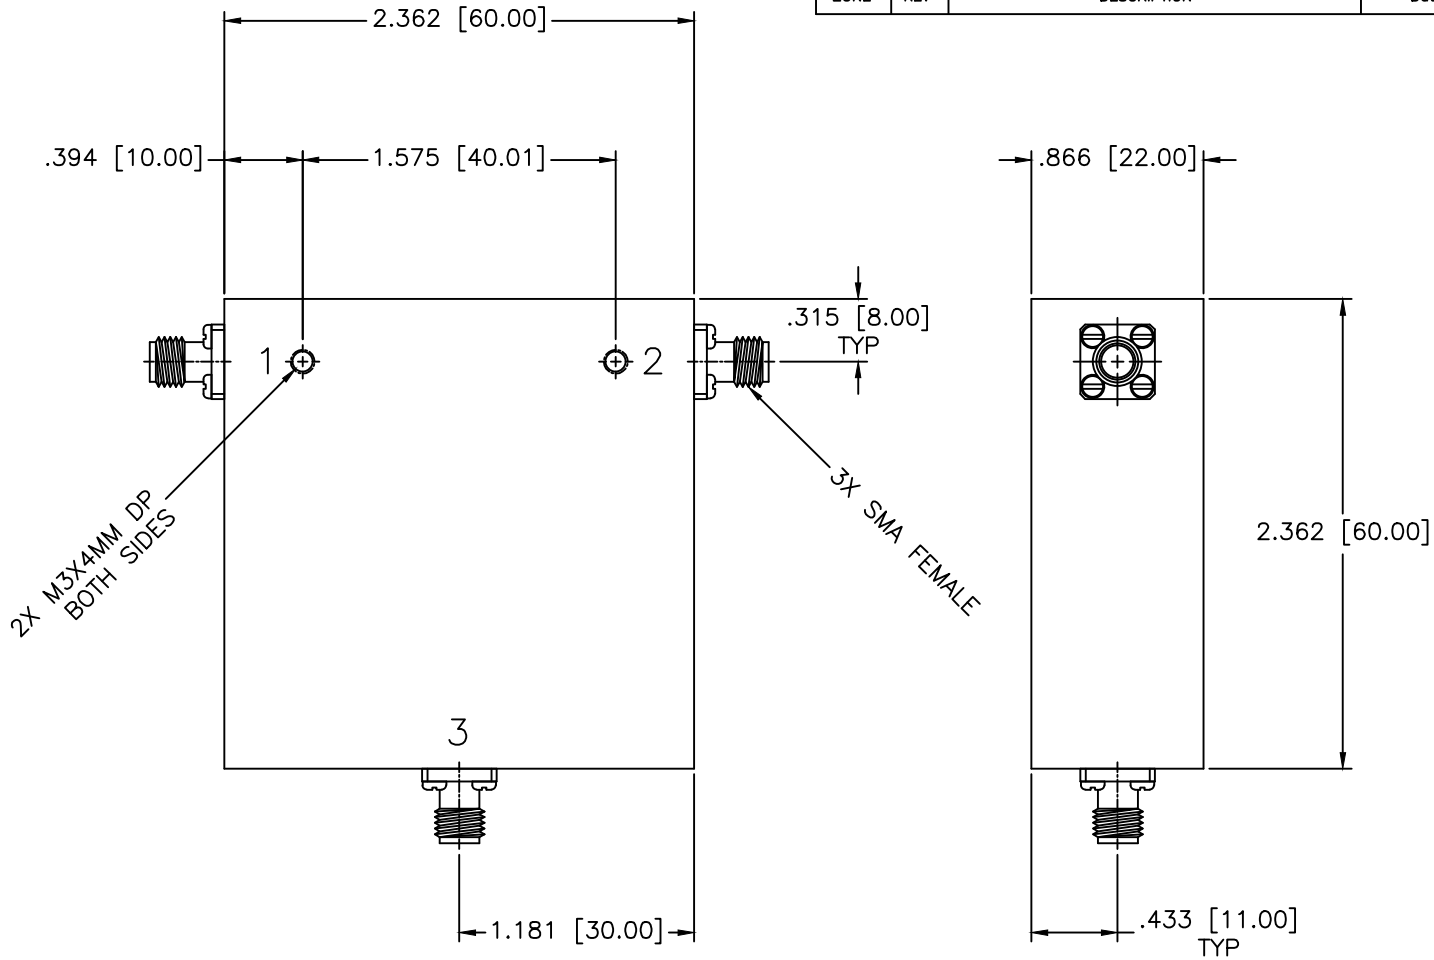

**SPECIFICATIONS**

Frequency Range: 1.12–2.24 GHz  
 Isolation: 17dB Min.  
 Insertion loss: 0.50dB Max.  
 VSWR: 1.35:1 Max.  
 Power Avg: 15 Watts  
 Power Peak: 150 Watts  
 Operating Temperature: 0°C to +50°C

MATERIAL:	
DRAWN: Paiboon Luexhamhan	DATE: 05-19-2010
APPROVED: T. Nguyen	DATE: 05-19-2010



MICROWAVE COMMUNICATIONS LABORATORIES INC.  
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
 TEL: (727) 344-6254 FAX: (727) 381-6116  
 http://www.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:  
 TOLERANCES  
 IN (INCHES) OR [mm] (MILLIMETERS)  
 FRACTIONS: ± 1/64  
 DECIMALS: ±.01 ±.005  
 ANGLE: ±1/2°

DRAWING TITLE:  
**COAXIAL CIRCULATOR**

PART NO.  
**CS-5-15**

CAGE CODE: OD2L5	SIZE: A	REV: A	DWG NO. 84843
DO NOT SCALE THE DRAWING			

