


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

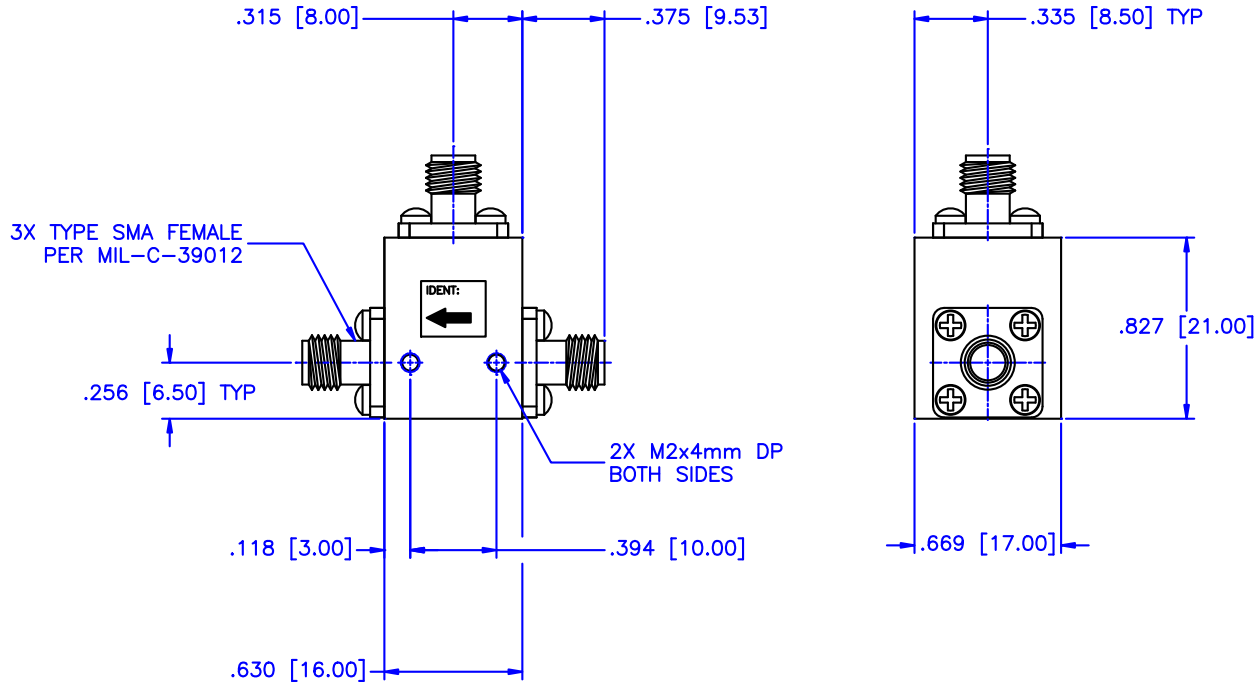

SPECIFICATIONS:

- Frequency Range: 7.8–18 GHz
- Isolation: 12dB Min.
- Insertion loss: 1.0dB Max.
- VSWR: 1.70:1 Max.
- Operating Temperature: –54°C to +100°C
- Circulator Power:
 - Average: 25 Watts
 - Peak: 250 Watts

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	COAXIAL CIRCULATOR
DRAWN:		DATE:	PART NO.		IS-66-1	
APPROVED:		DATE:	CAGE CODE:	SIZE:	REV:	DWG NO.
Paiboon Luekhamhan		05-18-2010	OD2L5	N/A	N/A	84042
T. Nguyen		05-18-2010	DO NOT SCALE THE DRAWING			

