


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

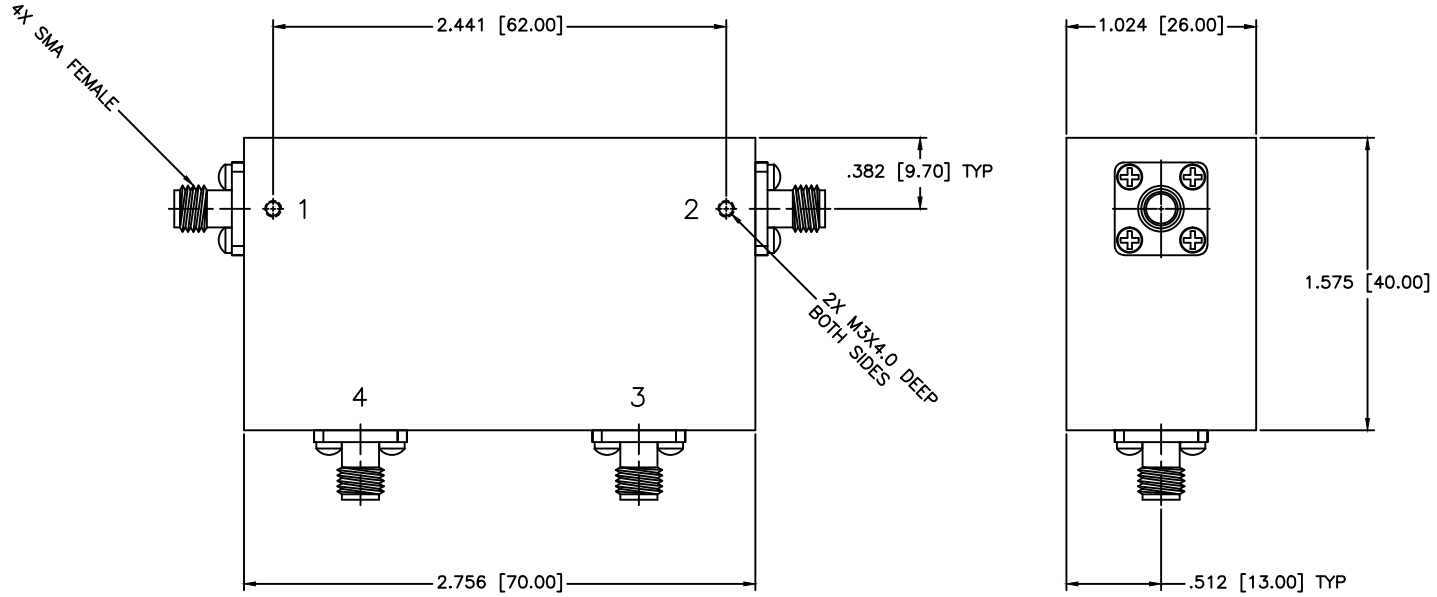

SPECIFICATIONS

- Frequency Range: 0.80–1.00 GHz
- Operating Temperature: –30°C to +70°C
- VSWR (All Port): 1.25:1
- Isolation (Port 2–1): 40dB
- Isolation (Port 3–2): 20dB
- Insertion Loss (Port 1–2): 1.0dB
- Insertion Loss (2–3): 0.5dB
- Average Power: 3 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		DRAWING TITLE: DUAL JUNCTION CIRCULATOR		
DRAWN: Paiboon Luekhamhan		PART NO.: CSDJ-2		
DATE: 06-28-2012		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: A	REV: N/A	DWG NO.: 86126
DATE: 06-28-2012		DO NOT SCALE THE DRAWING		

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION