


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

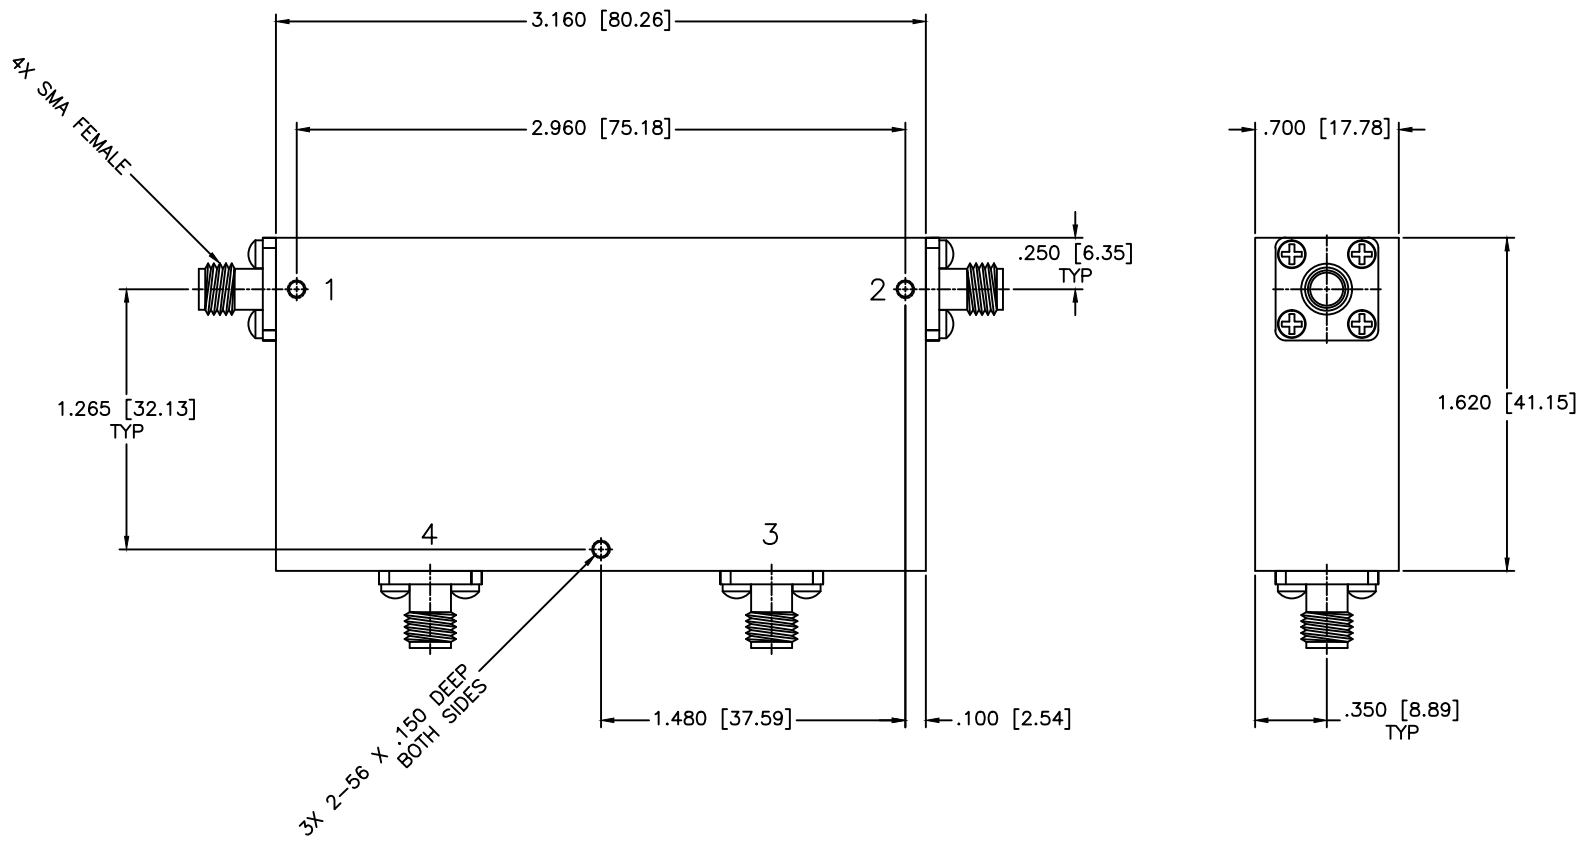

MODELS/SPECIFICATION

MODEL NUMBER	FREQ. RANGE (GHz)	ISOLATION (dB) MIN.	INSERTION LOSS (dB) MAX.	VSWR (dB) MAX.	POWER (WATT) AVG	OPERATING TEMPERATURE RANGE (°C)
CSDJ-3	0.7-0.8	40	0.8	1.25	200	-20 to +65
CSDJ-4	0.8-0.9	40	0.8	1.25	150	-20 to +65
CSDJ-5	2.0-4.0	36	1.0	1.30	20	0 to +50

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-07-2009
APPROVED: T. Nguyen	DATE: 04-07-2009

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <h2 style="text-align: center;">DUAL JUNCTION CIRCULATOR</h2>		PART NO.:	
CSDJ-3, -4 & -5		CAGE CODE:	
OD2L5		SIZE: N/A	REV: N/A
DO NOT SCALE THE DRAWING		DWG NO. 84474	