


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

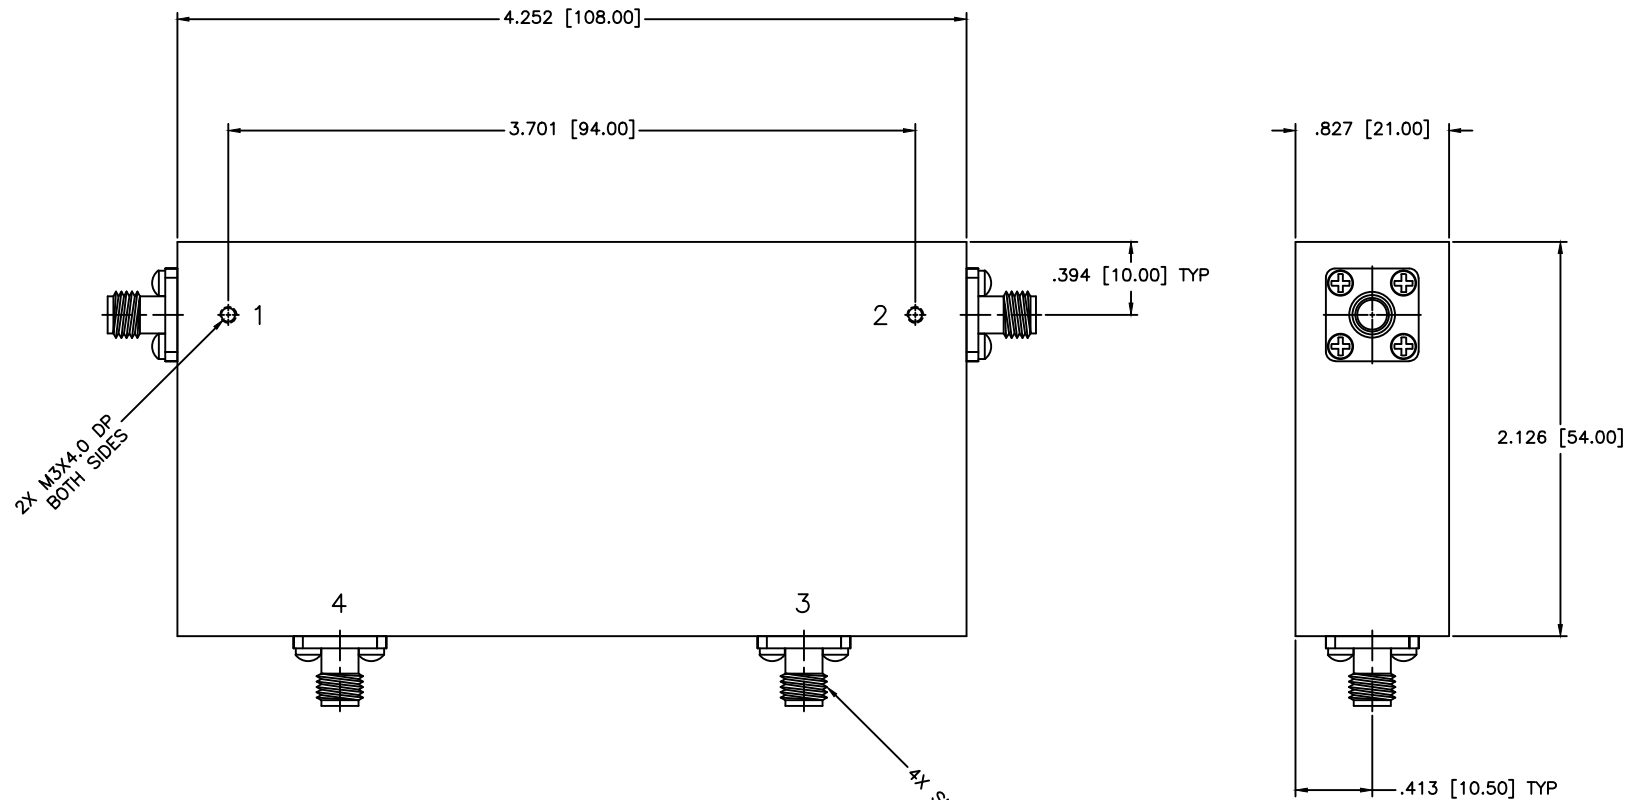

**SPECIFICATIONS**

Frequency Range: 1.6–2.2 GHz  
 Operating Temperature: 0°C to +50°C  
 VSWR (All Port): 1.25:1  
 Isolation (Port 2–1): 40dB  
 Isolation (Port 3–2): 20dB  
 Insertion Loss (Port 1–2): 1.0dB  
 Insertion Loss (2–3): 0.5dB  
 Average Power: 3 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°			DRAWING TITLE:	DUAL JUNCTION CIRCULATOR	
DRAWN: Paiboon Luekhamhan		DATE: 06-28-2012	PART NO.:	CSDJ-6	
APPROVED: T. Nguyen		DATE: 06-28-2012	CAGE CODE:	SIZE: A	REV: N/A
THIRD ANGLE PROJECTION 		DWG NO.: 86125 DO NOT SCALE THE DRAWING	CAGE CODE: OD2L5	DWG NO.: 86125	