


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

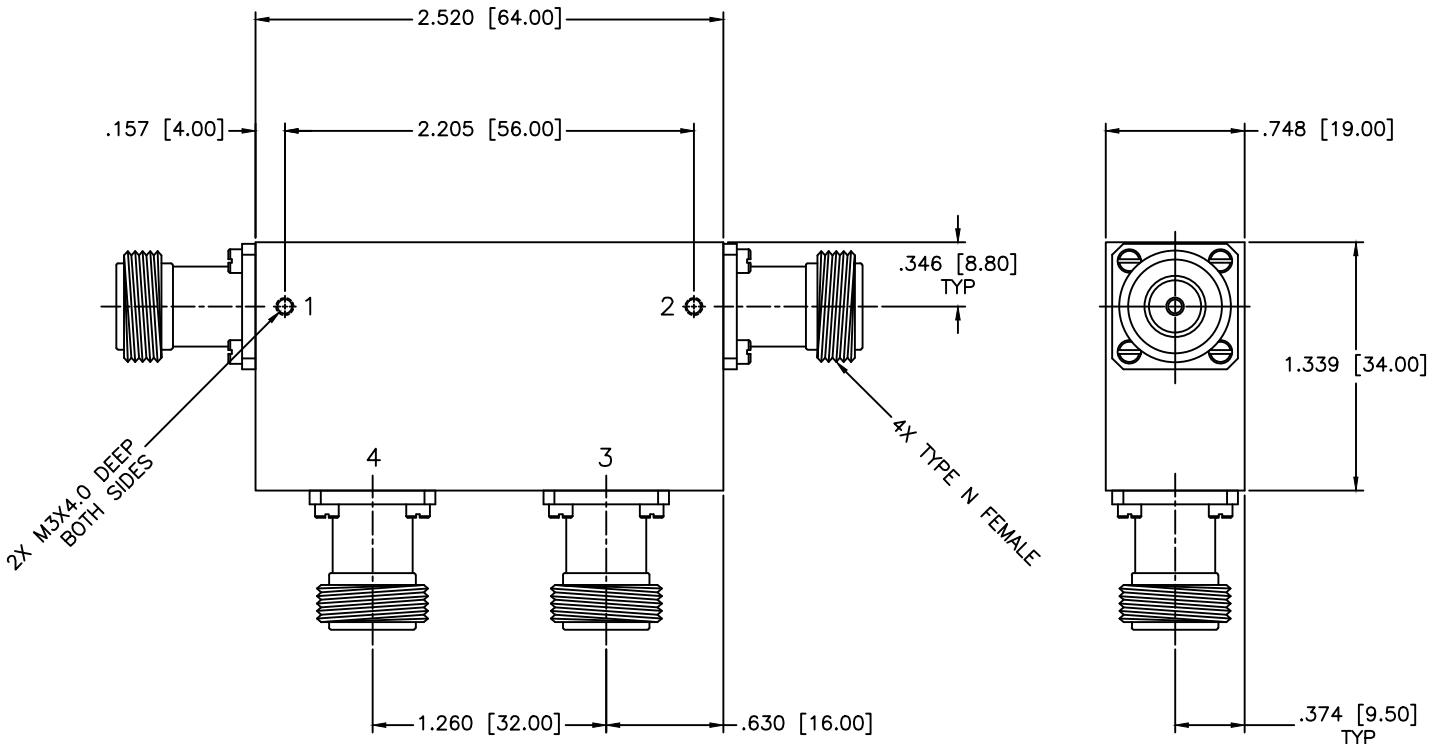

**SPECIFICATIONS**

Frequency Range: 5.0–5.15 GHz  
 Isolation: 20dB Min.  
 Insertion loss: 0.80dB Max.  
 VSWR: 1.20:1 Max.  
 Power: 25W Avg, 250W Peak  
 Operating Temperature: –54°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-07-2013		DRAWING TITLE: CIRCULATOR, DUAL JUNCTION	
APPROVED: T. Nguyen		DATE: 03-07-2013		PART NO. CSDJ-9	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
		THIRD ANGLE PROJECTION 		DWG NO. 86232	