


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

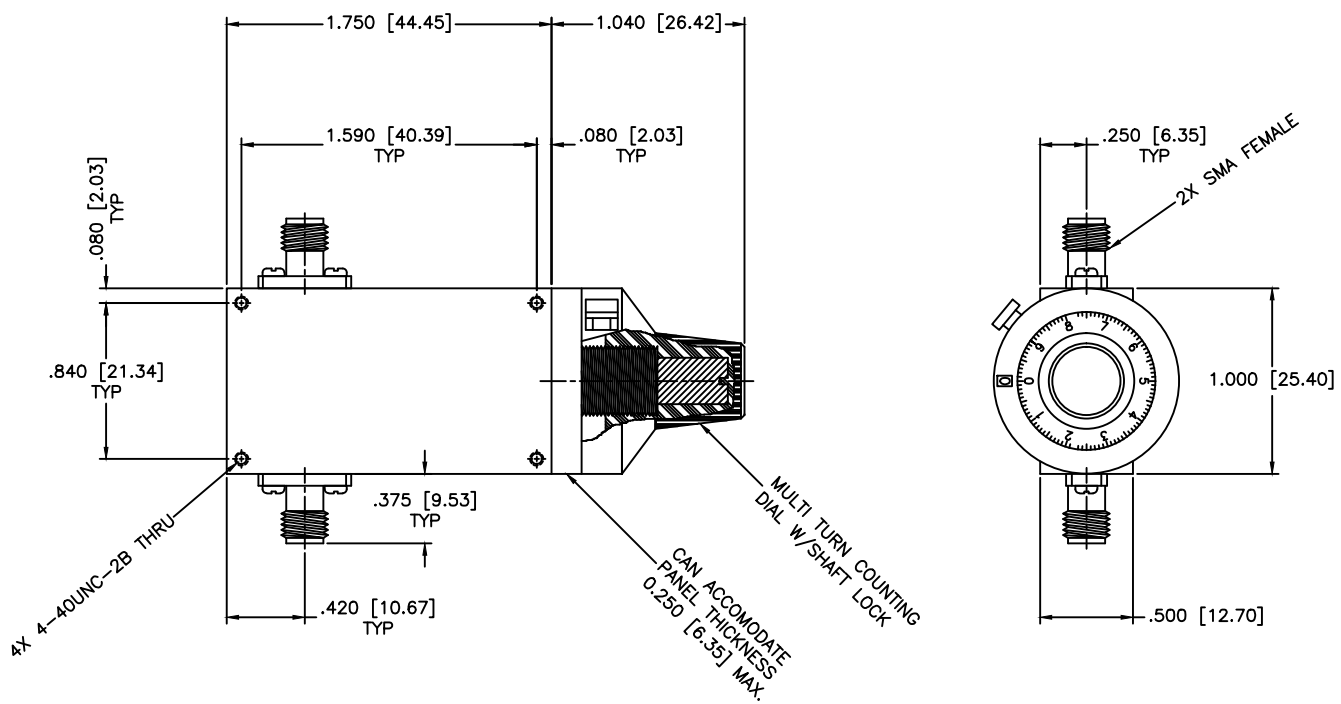

SPECIFICATIONS

Frequency Range: 14–26.5 GHz
 Attenuation: 20dB
 Insertion Loss: 0.75dB Max.
 VSWR: 1.70:1 Max.
 RF Power: 7W Avg. 3kW Peak

ENVIRONMENTAL

Temperature Range: –55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000ft. Survival 25,000ft Operating

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .015 ANGLE: ± 1/2°		SHEET:	N/A	
DRAWING TITLE:		CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL				PART NO.	
DRAWN:		Paiboon Luekhamhan		DATE:		08-21-2007	
APPROVED:		T. Nguyen		DATE:		08-21-2007	
CAGE CODE:		OD2L5		SIZE:		A	
REV:		N/A		DWG NO.:		82919	
DO NOT SCALE THE DRAWING							



UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ± .015
 ANGLE: ± 1/2°

THIRD ANGLE PROJECTION

DRAWING TITLE:		CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL			
PART NO.:		CVA14-20/D			
CAGE CODE:	SIZE:	REV:	DWG NO.:		
OD2L5	A	N/A	82919		
DO NOT SCALE THE DRAWING					