


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

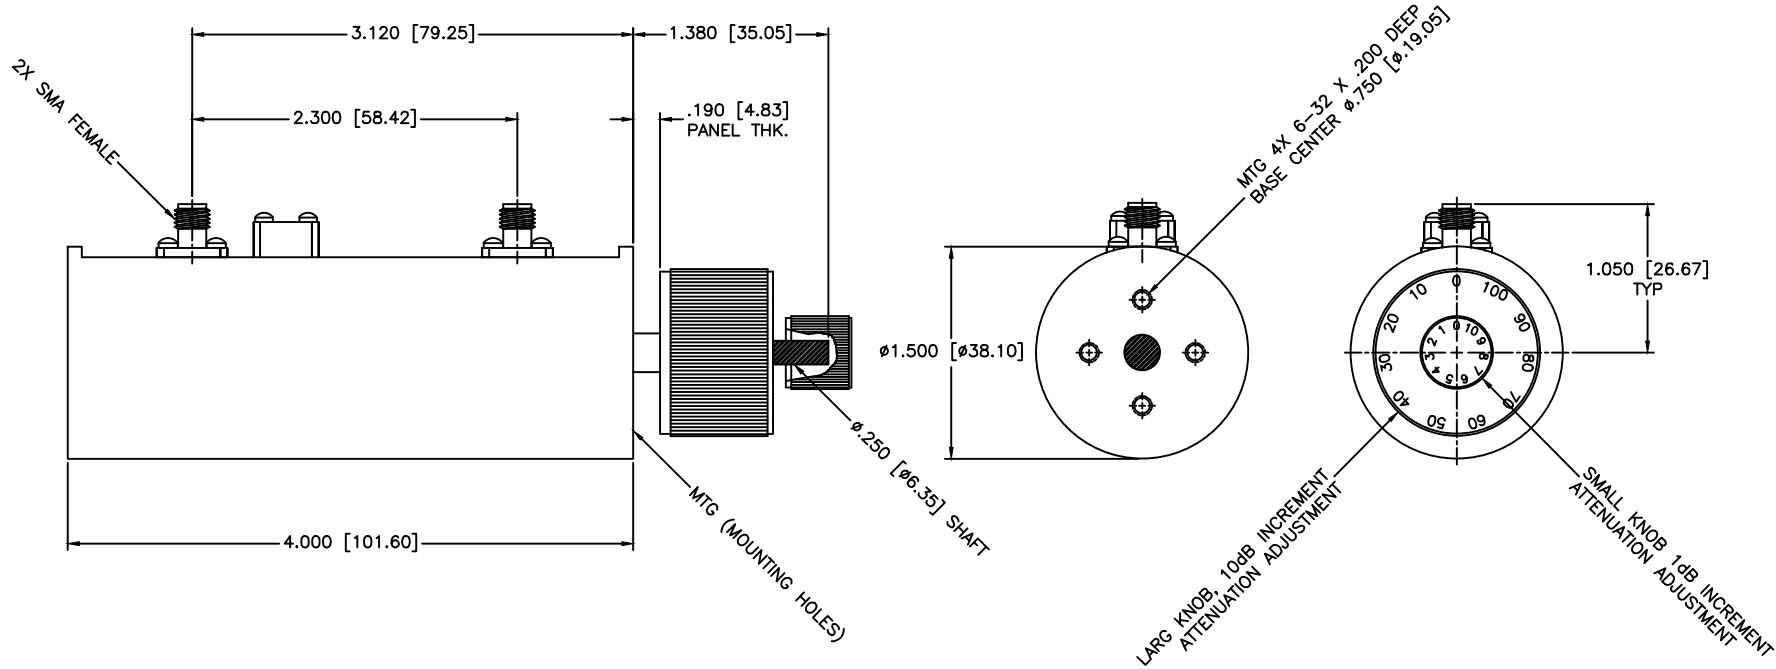

SPECIFICATIONS

Frequency Range: DC–2.5 GHz
 Attenuation: 0–50dB (±0.4dB or 3%)
 Insertion Loss: 1.0dB Max.
 VSWR: 1.50:1 Max.
 RF Power: 2W Avg. 1kW Peak

Environmental

Temperature Range: –20°C to +85°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000ft. Survival 25,000ft Operating

MATERIAL:	
DRAWN:	DATE:
Pai boon Luekhamhan	02-07-2011
APPROVED:	DATE:
T. Nguyen	02-07-2011

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DUAL CONCENTRIC ROTARY STEP ATTENUATOR		
		PART NO.		
		CVA26-050/DD		
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	N/A	N/A	85369	
DO NOT SCALE THE DRAWING				