


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

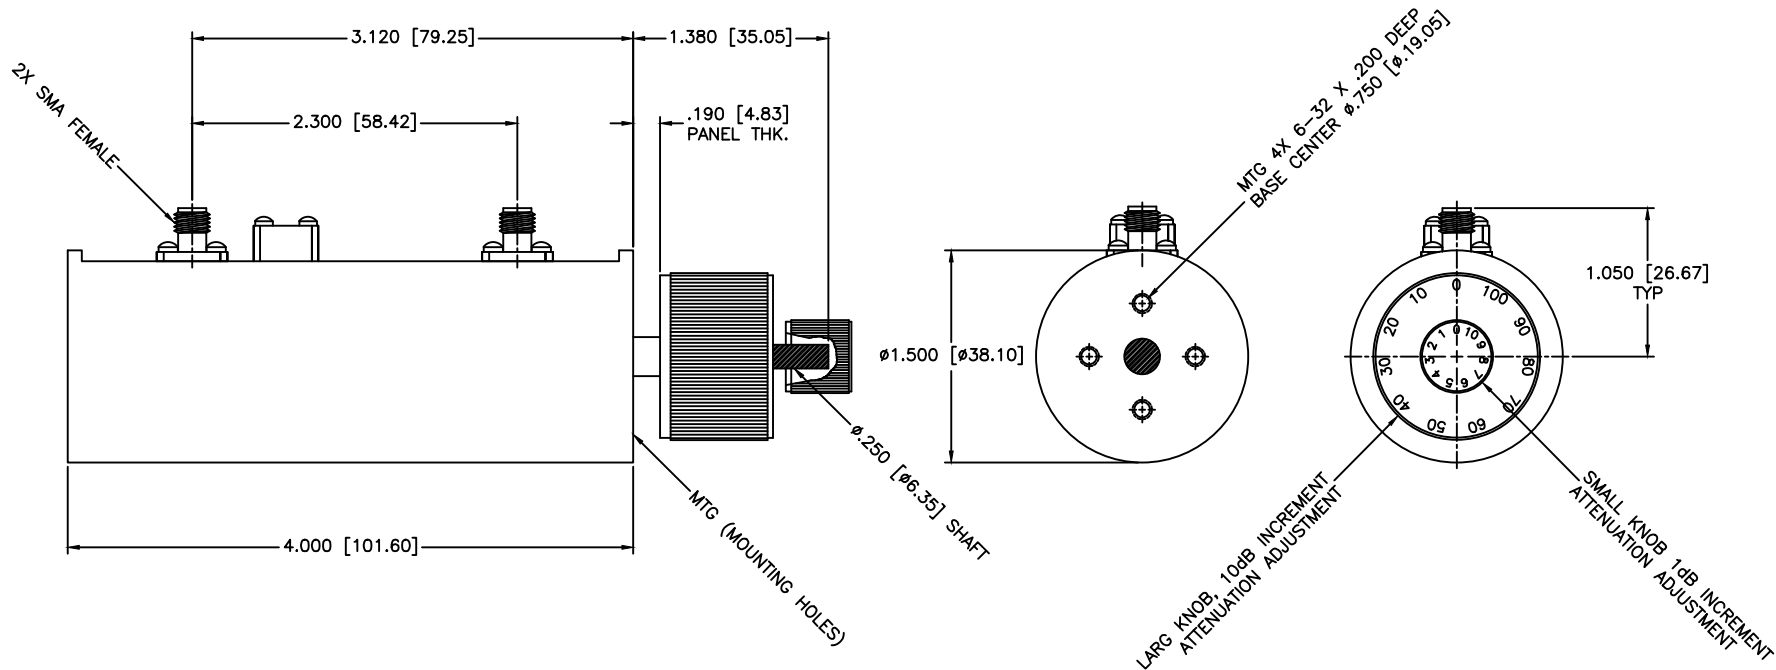

SPECIFICATIONS

Frequency Range: 406–406.1 MHz
 Attenuation: 30dB (±0.2dB or 1%)
 Insertion Loss: 0.5dB Max.
 VSWR: 1.50:1 Max.
 RF Power: 2W Avg. 1kW Peak

Environmental

Temperature Range: –20°C to +85°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000ft. Survival 25,000ft Operating

MATERIAL:	
DRAWN:	DATE:
Pai boon Luekhamhan	02-07-2011
APPROVED:	DATE:
T. Nguyen	02-07-2011

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DRAWING TITLE:		
		DUAL CONCENTRIC ROTARY STEP ATTENUATOR		
		PART NO. CVA34-30		
CAGE CODE:	SIZE:	REV:	DWG NO.	
0D2L5	N/A	N/A	85367	
DO NOT SCALE THE DRAWING				