


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

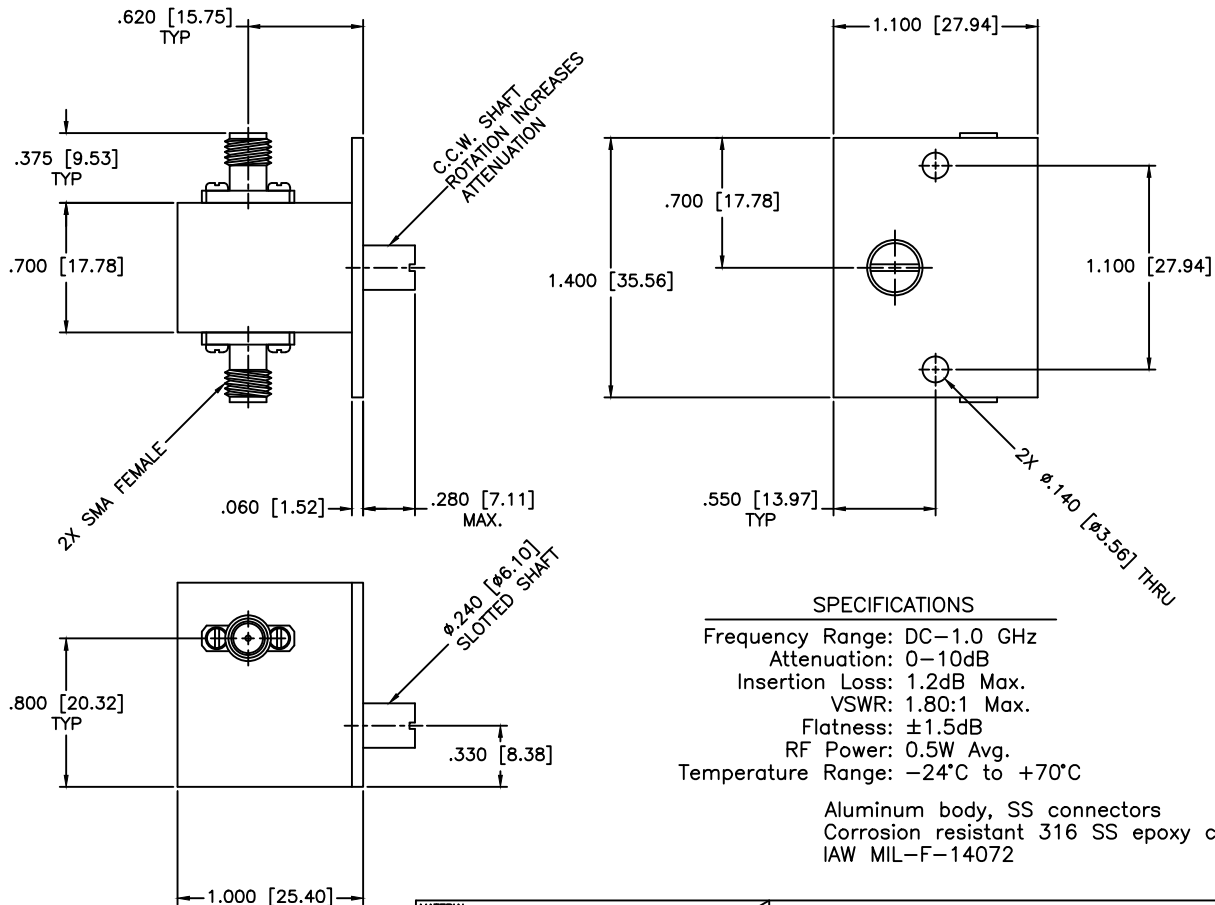

SPECIFICATIONS

Frequency Range: DC-1.0 GHz
 Attenuation: 0-10dB
 Insertion Loss: 1.2dB Max.
 VSWR: 1.80:1 Max.
 Flatness: \pm 1.5dB
 RF Power: 0.5W Avg.
 Temperature Range: -24°C to +70°C

Aluminum body, SS connectors
 Corrosion resistant 316 SS epoxy coating
 IAW MIL-F-14072

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm .01 \pm .005 ANGLE: \pm 1/2°		DRAWING TITLE: VARIABLE ATTENUATOR		
DRAWN: Paiboon Luekhamhan		PART NO. CVA39-10		
DATE: 06-09-2016		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 06-09-2016		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A	REV: N/A	DWG NO. 86627
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		