


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

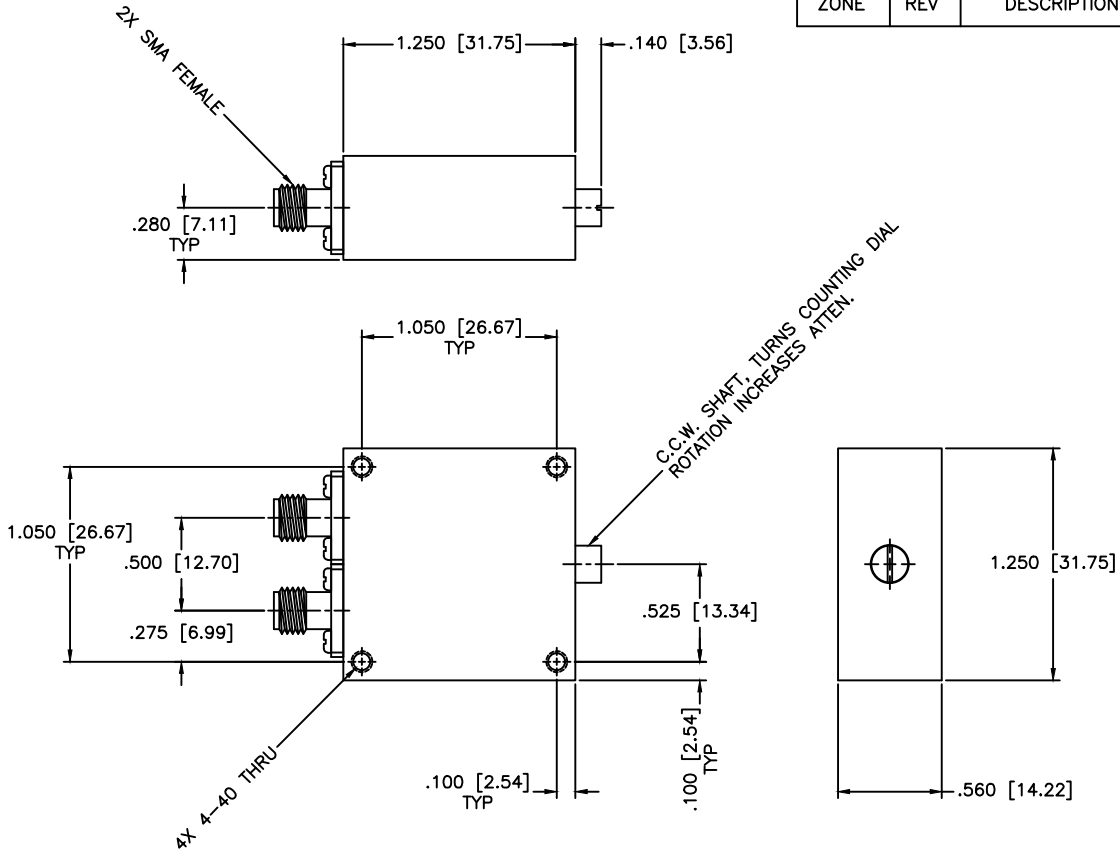

SPECIFICATIONS

- Frequency Range: DC-500 MHz
- Attenuation: 0-10dB
- Insertion loss: 0.5dB Max.
- Flatness: ±1.0dB
- VSWR: 1.80:1 Max.
- RF Power: 0.5W Avg.
- Impedance: 50 Ohms
- Operating Temperature: -20°C to +70°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: COAXIAL ATTENUATOR		PART NO. CVAL1-10			
DRAWN: Paiboon Luekhamhan	DATE: 06-10-2016	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 86635
APPROVED: T. Nguyen	DATE: 06-10-2016	THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	