


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: DC-500 MHz
Attenuation Range: 0-10dB
Insertion loss: 0.5dB Max.
Flatness: ±1.0dB
VSWR: 1.80:1 Max.
RF Power: 0.5W Avg.
Impedance: 50 Ohms
Operating Temperature: -24°C to +70°C

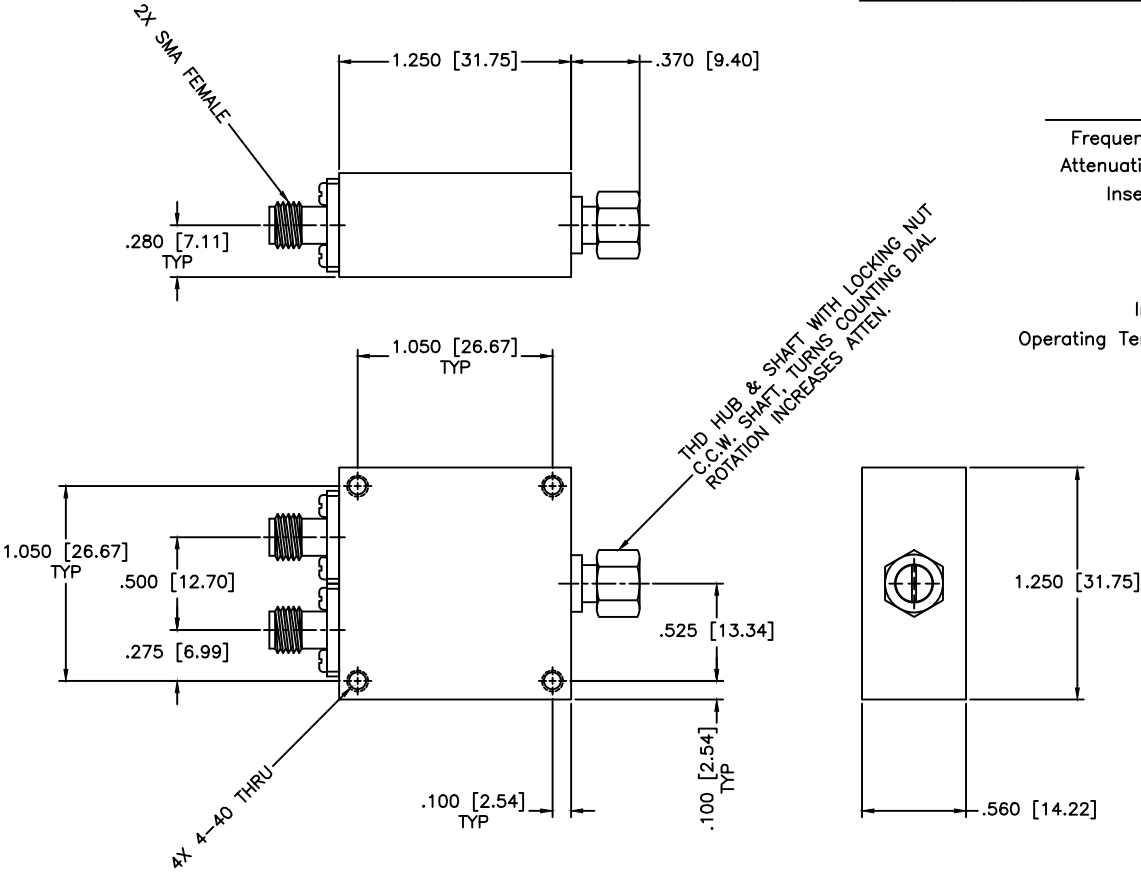

MATERIAL:	
DRAWN: Pai boon Luekhamhan	DATE: 06-10-2016
APPROVED: T. Nguyen	DATE: 06-10-2016

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: COAXIAL ATTENUATOR WITH LOCKING NUT		PART NO. CVAL1-10/LN	
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 86634
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION