


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

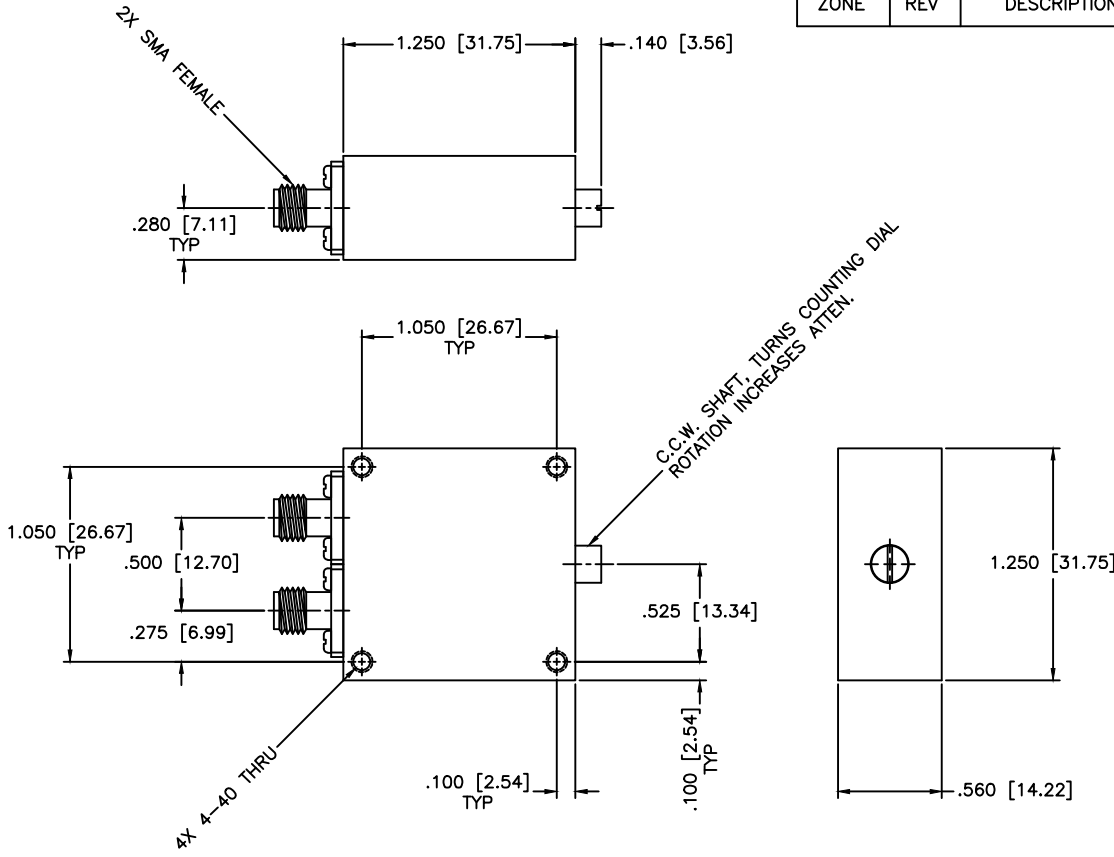

SPECIFICATIONS

Frequency Range: DC-500 MHz
 Attenuation Min/Typ: 0-5dB/0-20dB
 Insertion loss: 0.5dB Max.
 Flatness: ±1.0dB
 VSWR: 1.80:1 Max.
 RF Power: 0.5W Avg.
 Impedance: 50 Ohms
 Operating Temperature: -20°C to +70°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
					SHEET:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		DRAWING TITLE:			COAXIAL ATTENUATOR
DRAWN:		DATE:		PART NO.			CVAL1-15
Paitoon Luekhamhan 01-30-2008		T. Nguyen 01-30-2008		CAGE CODE:		OD2L5	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A REV: N/A DO NOT SCALE THE DRAWING		DWG NO.	83051
		THIRD ANGLE PROJECTION 					