


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

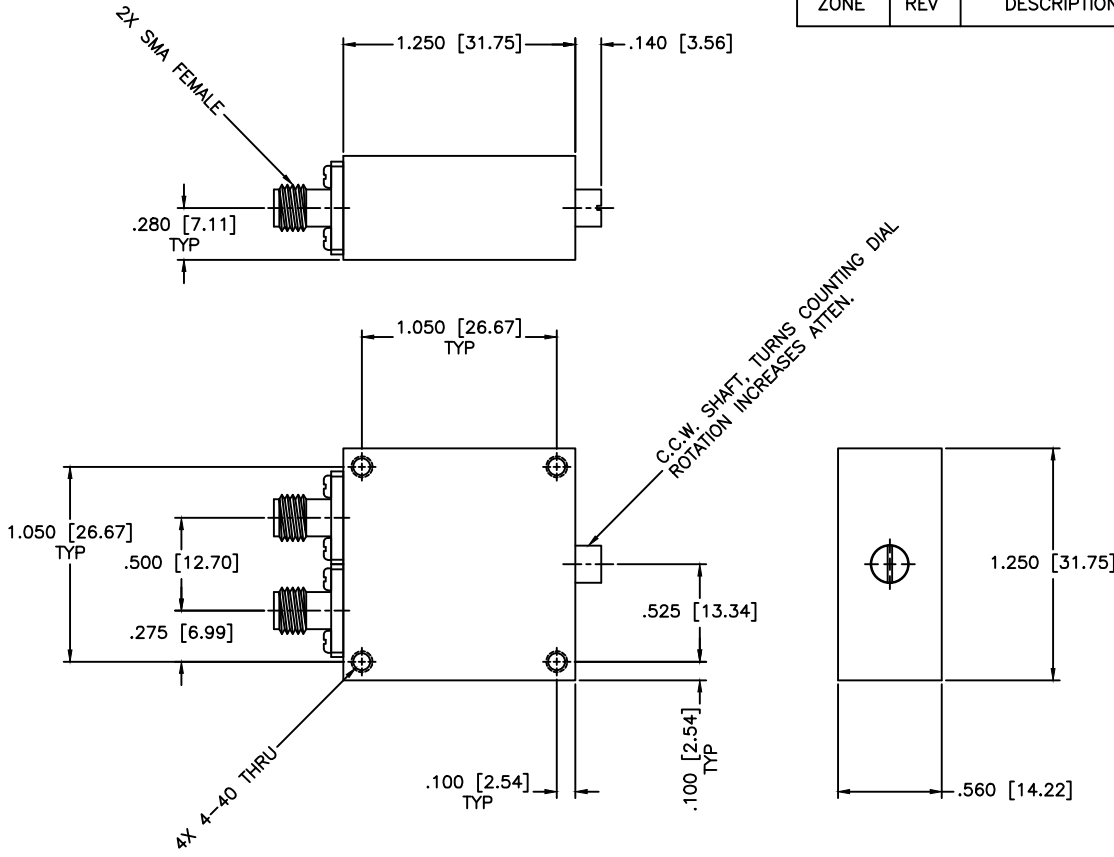

SPECIFICATIONS

- Frequency Range: DC-1.0 GHz
- Attenuation Range: 0-10dB
- Insertion loss: 0.5dB Max.
- Flatness: ±1.5dB
- VSWR: 1.80:1 Max.
- RF Power: 0.5W Avg.
- Impedance: 50 Ohms
- Operating Temperature: -24°C to +70°C

MATERIAL:	
/	
DRAWN: Paiboon Luekhamhan	DATE: 06-09-2016
APPROVED: T. Nguyen	DATE: 06-09-2016

MCLI	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: COAXIAL ATTENUATOR		PART NO. CVAL2-10	
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 86637
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION