


| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

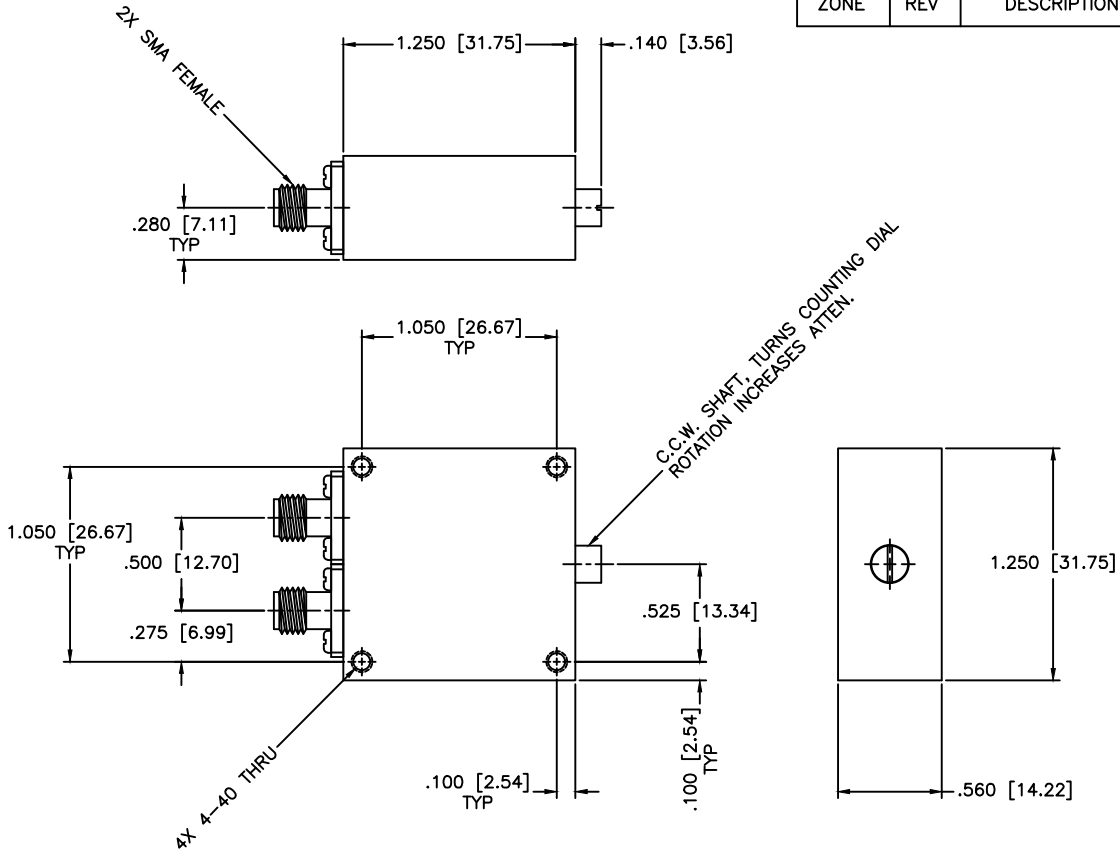

SPECIFICATIONS

- Frequency Range: DC-1.0 GHz
- Attenuation Range: 0-15dB
- Insertion loss: 1.2dB Max.
- Flatness: ±1.5dB
- VSWR: 1.80:1 Max.
- RF Power: 0.5W Avg.
- Impedance: 50 Ohms
- Operating Temperature: -24°C to +70°C

| | | | | |
|---|--|--|------------------|-------------|
| MATERIAL: | | MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM | SCALE: | N/A |
| | | | SHEET: | N/A |
| UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2° | | DRAWING TITLE: COAXIAL ATTENUATOR | | |
| DRAWN: Pai boon Luekhamhan | | PART NO. CVAL2-15 | | |
| DATE: 06-09-2016 | | CAGE CODE: | SIZE: A | REV: N/A |
| APPROVED: T. Nguyen | | 06-09-2016 | DWG NO. 86628 | |
| PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) | | DO NOT SCALE THE DRAWING | | |

