


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

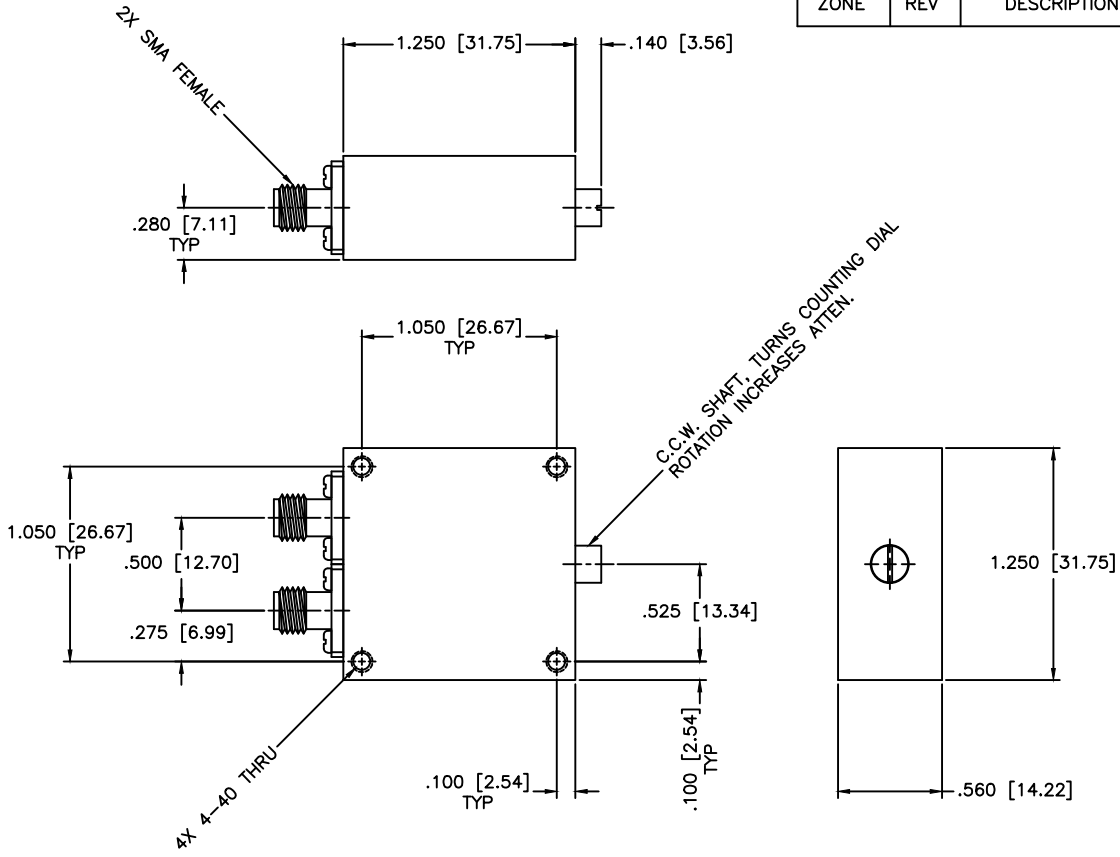

**SPECIFICATIONS**

- Frequency Range: DC-200 MHz
- Attenuation Range: 0-10dB
- Insertion loss: 0.5dB Max.
- Flatness: ±0.5dB
- VSWR: 1.80:1 Max.
- RF Power: 0.5W Avg.
- Impedance: 50 Ohms
- Operating Temperature: -24°C to +70°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		SHEET: N/A	
DRAWING TITLE:		COAXIAL ATTENUATOR				
PART NO.:		CVAL3-10				
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:	REV:	DWG NO.:
APPROVED:	DATE:		OD2L5	A	N/A	86639
		THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		

DRAWN: Paitoon Luekhamhan  
 DATE: 06-10-2016  
 APPROVED: T. Nguyen  
 DATE: 06-10-2016