


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

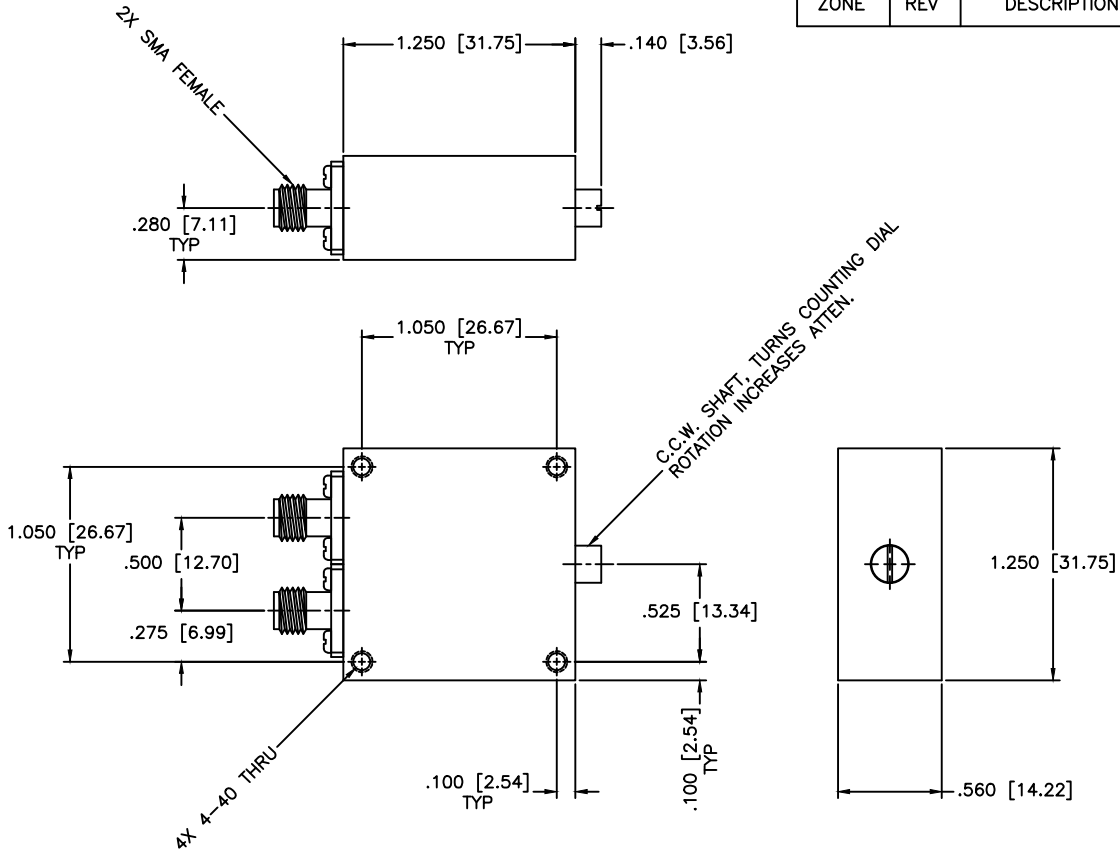

SPECIFICATIONS

- Frequency Range: DC-200 MHz
- Attenuation Range: 0-15dB
- Insertion loss: 0.5dB Max.
- Flatness: ±0.5dB
- VSWR: 1.80:1 Max.
- RF Power: 0.5W Avg.
- Impedance: 50 Ohms
- Operating Temperature: -24°C to +70°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°	DRAWING TITLE: COAXIAL ATTENUATOR	
DRAWN: Pai boon Luekhamhan		DATE: 06-10-2016	PART NO. CVAL3-15	
APPROVED: T. Nguyen		DATE: 06-10-2016	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 86630
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	