


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

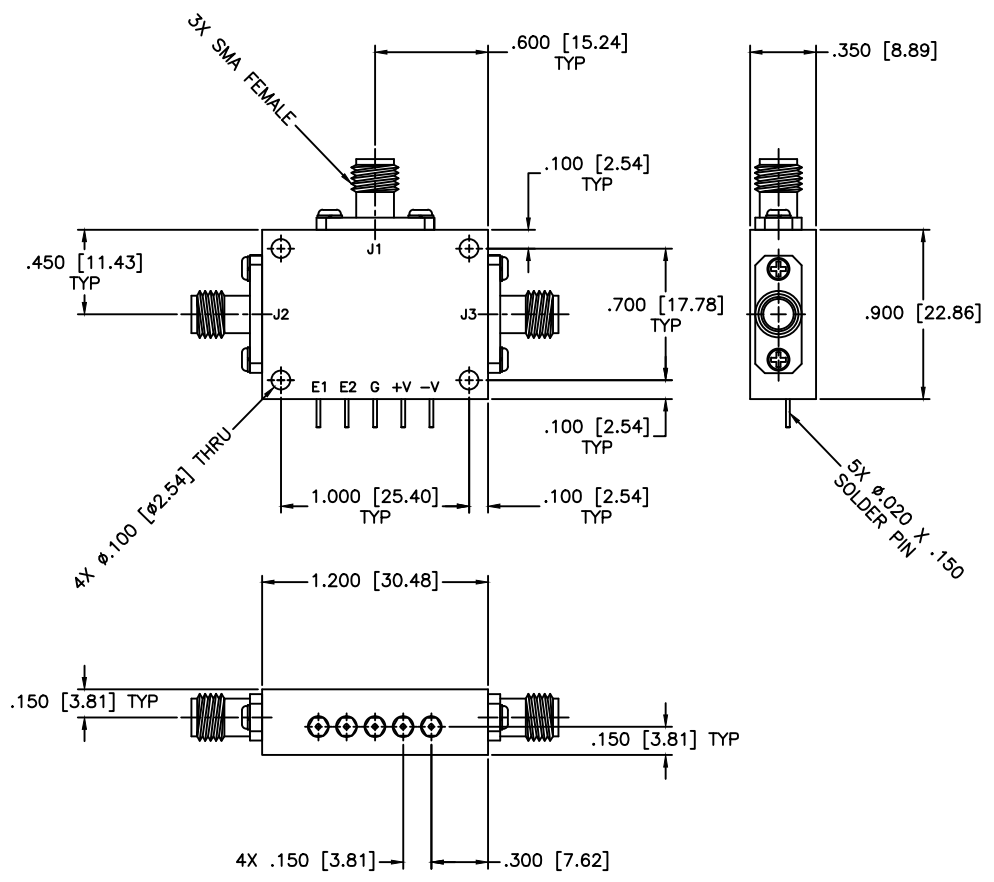

DC BIAS (STANDARD)  
+5V ±0.5V @ 80mA Max.  
-15V ±3V @ 50 mA Max.

CONTROL  
TTL 0 = Low Loss    E1 Controls J2 - J1  
TTL 1 = Isolation    E2 Controls J3 - J1

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-15-2001
APPROVED: T. Nguyen	DATE: 11-15-2001

**MCLI** MICROWAVE COMMUNICATIONS LABORATORIES INC.  
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
TEL: (727) 344-6254 FAX: (727) 381-6116  
http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:  
TOLERANCES  
IN (INCHES) OR [mm] (MILLIMETERS)  
FRACTIONS: ± 1/64  
DECIMALS: ±.02 ±.008  
ANGLE: ±1/2°

PROPRIETARY NOTICE:  
THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
PERMISSION FROM MICROWAVE COMMUNICATIONS  
LABORATORIES INC. (MCLI)  
THIRD ANGLE PROJECTION

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	PIN DIODE SWITCHES		
PART NO.:	D2-15/D		
CAGE CODE:	SIZE:	REV:	DWG NO.:
OD2L5	A	N/A	81878
DO NOT SCALE THE DRAWING			