
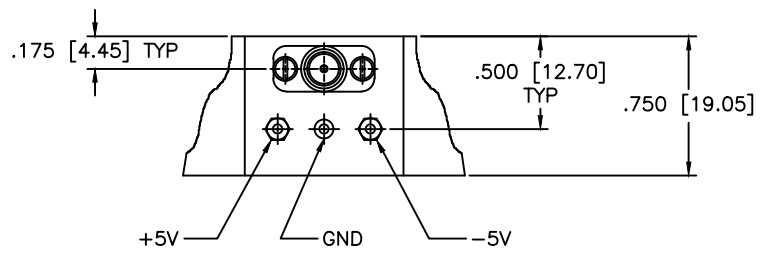


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

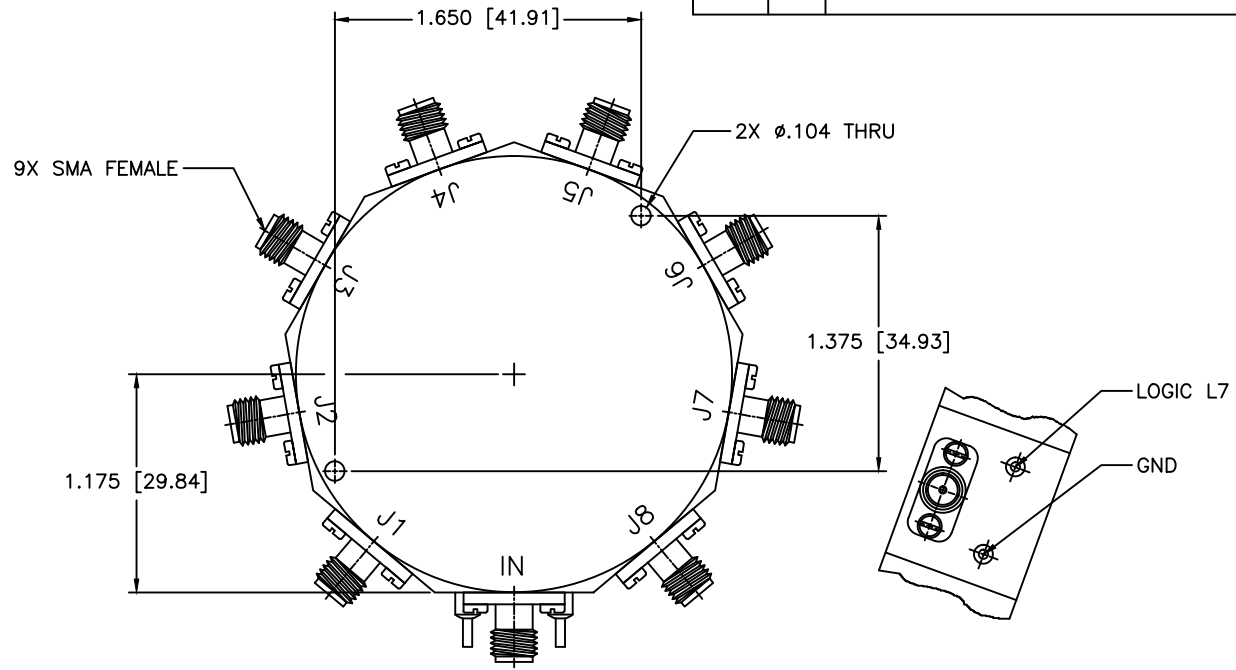

SPECIFICATIONS

FREQUENCY RANGE: 2-18 GHz
 INSERTION LOSS: 3.5dB Max.
 ISOLATION: 55dB Min.
 VSWR: 2.00:1 Max.
 INPUT POWER: 200 mW (23 dBm)
 SWITCHING TIME: 100 nSEC
 OPERATING TEMPERATURE: -55°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 08-21-2005
APPROVED: T. Nguyen	DATE: 08-21-2005

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: PIN DIODE SWITCHES		PART NO.: D8-9		
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A	DWG NO.: 82388
DO NOT SCALE THE DRAWING				

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION