


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

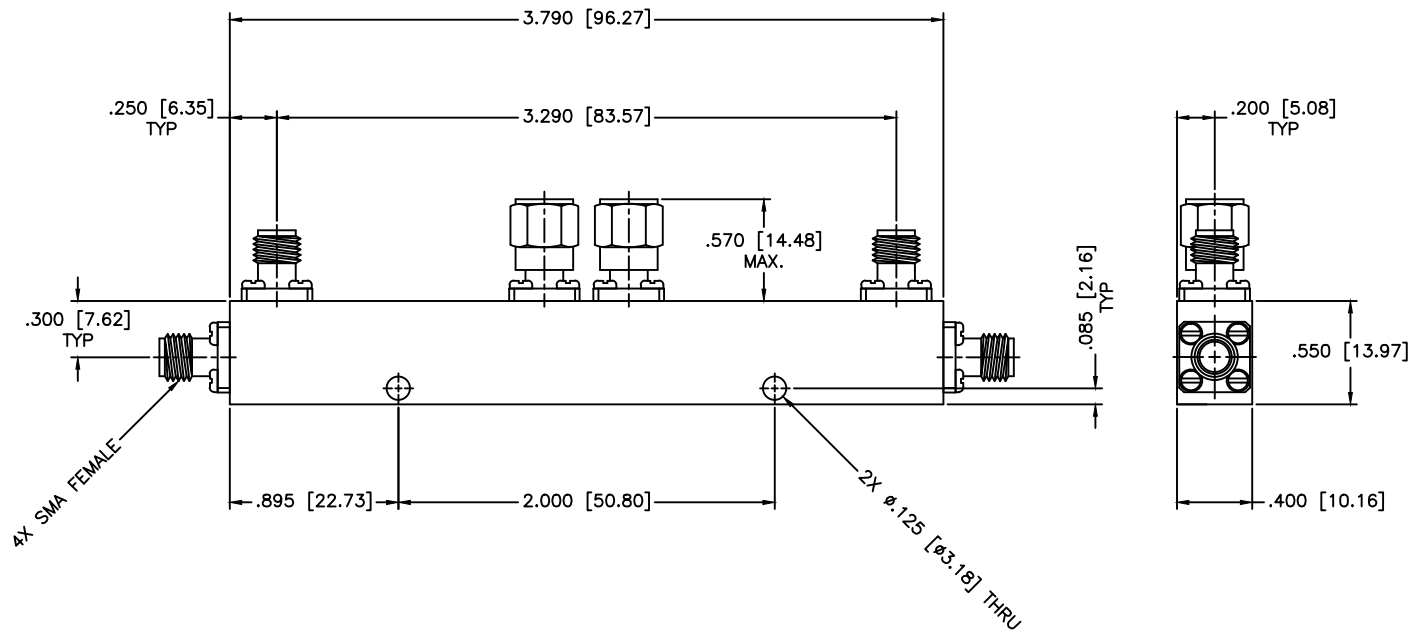

SPECIFICATIONS

- Frequency Range: 0.95–2.15 GHz
- Coupling: 6 ± 1.25 dB
- VSWR: 1.15:1 Max.
- True Insertion loss: 1.50 dB Max.
- Directivity: 22 dB Min.
- Frequency Sensitivity: ± 0.80 dB
- Power Incident, Reflected: 50W, 3W

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.02 \pm 0.009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		PART NO.: DC14-6	
DATE: 04-15-2005		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 04-15-2005	
<small>PROCEDURAL NOTE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		SIZE: A	REV: N/A
		DWG NO.: 82969	
DO NOT SCALE THE DRAWING			