


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

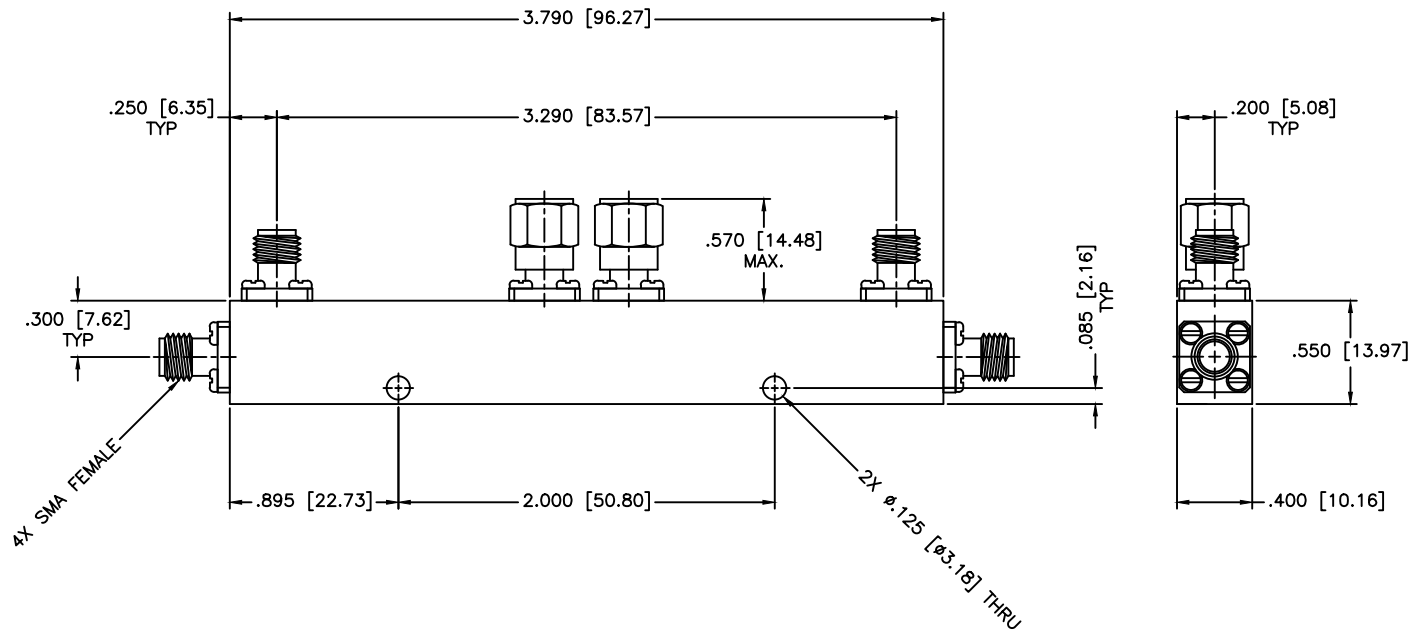

SPECIFICATIONS

Frequency Range: 1–2 GHz
 VSWR: 1.15:1 Max.
 Insertion loss: 1.5dB Max.
 Directivity: 22dB Max.
 Freq Sensitivity: ±0.80dB
 Coupling: 10±1.25dB
 Power: 50W, 3kW Peak

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-15-2005
APPROVED: T. Nguyen	DATE: 04-15-2005

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .009 ANGLE: ± 1/2°		SHEET: N/A
DRAWING TITLE: DUAL DIRECTIONAL COUPLER			
PART NO. DC2-10			
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 82329
DO NOT SCALE THE DRAWING			

