


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

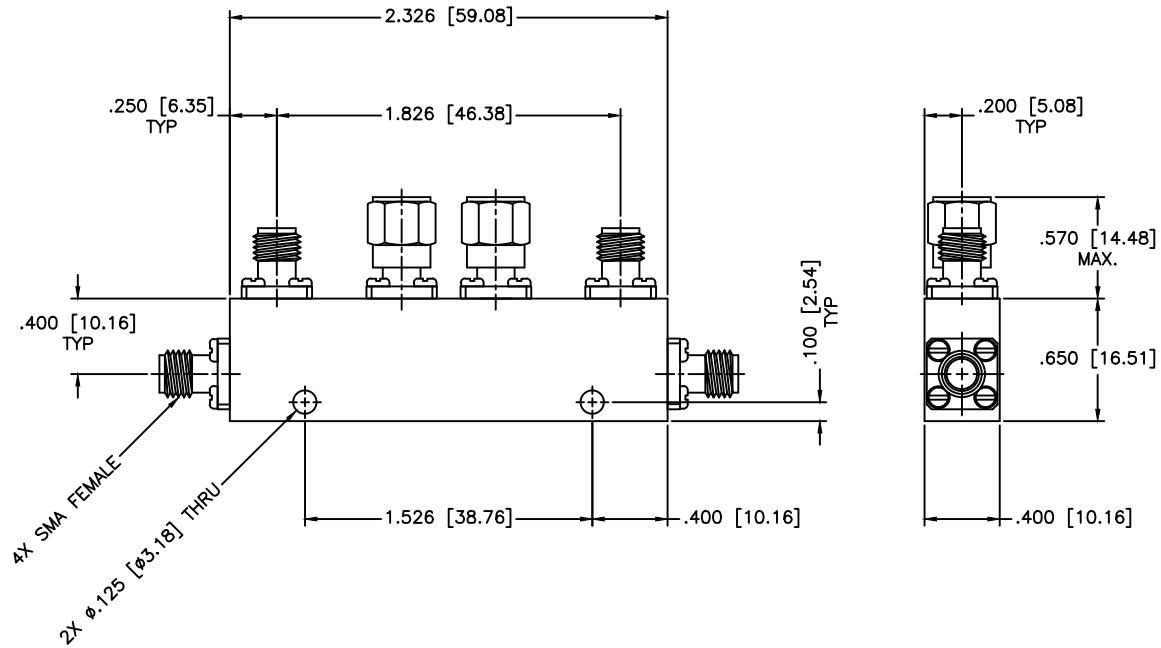

SPECIFICATIONS

Frequency Range: 2-4 GHz
 VSWR: 1.20:1 Max.
 Insertion loss: 0.5dB Max.
 Directivity: 20dB Max.
 Freq Sensitivity: ± 0.85 dB
 Coupling: 20 ± 1.25 dB
 Power: 50W, 3kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DUAL DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. DC3-20		
DATE: 11-23-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 11-23-1997		
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		SIZE: A	REV: N/A	DWG NO. 80614
DO NOT SCALE THE DRAWING				