


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

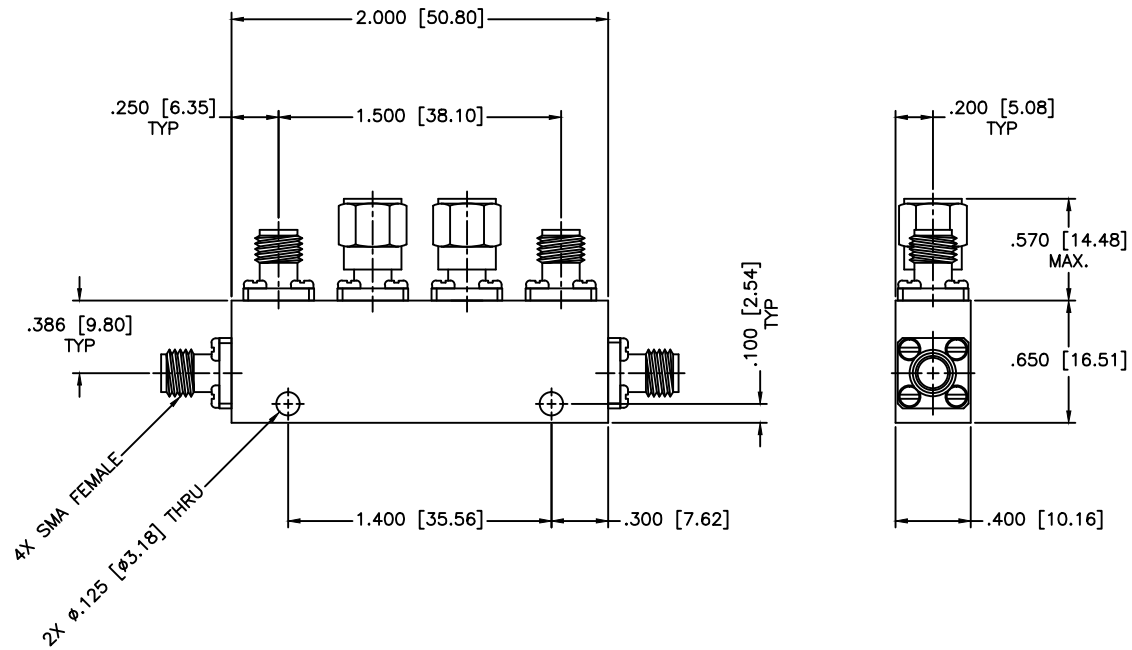

**SPECIFICATIONS**

Frequency Range: 2.6–5.2 GHz  
 VSWR: 1.30:1 Max.  
 Insertion loss: 0.5dB Max.  
 Directivity: 18dB Max.  
 Freq Sensitivity:  $\pm 0.8$ dB  
 Coupling:  $20 \pm 1.25$ dB

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: <b>DUAL DIRECTIONAL COUPLER</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: DC4-20	
DATE: 12-03-2009		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 12-03-2009	
THIRD ANGLE PROJECTION		SIZE: A REV: A DWG NO.: 80617	
		DO NOT SCALE THE DRAWING	