


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

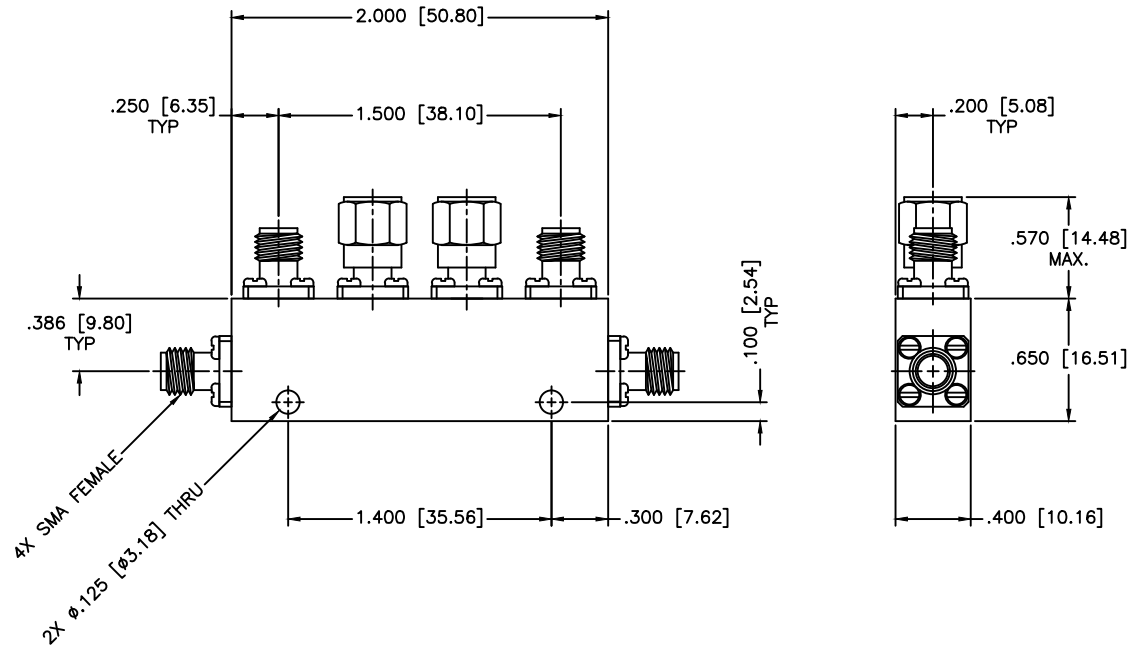

SPECIFICATIONS

Frequency Range: 2.6–5.2 GHz
 VSWR: 1.30:1 Max.
 Insertion loss: 0.4dB Max.
 Directivity: 18dB Max.
 Freq Sensitivity: ± 0.8 dB
 Coupling: 30 ± 1.25 dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.02 \pm 0.009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DUAL DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. DC4-30		
DATE: 12-03-2009		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 12-03-2009		
THIRD ANGLE PROJECTION		SIZE: A REV: A DWG NO. 80618		
		DO NOT SCALE THE DRAWING		