


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

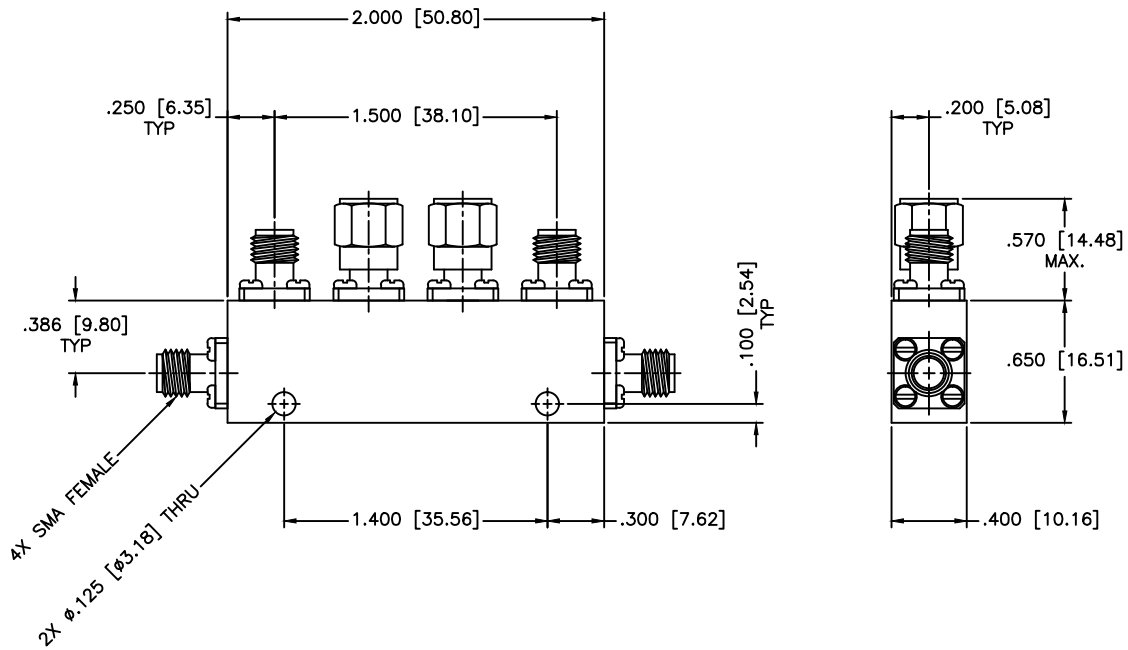

SPECIFICATIONS

Frequency Range: 2.6–5.2 GHz
 VSWR: 1.35:1 Max.
 Insertion loss: 1.5dB Max.
 Directivity: 18dB Max.
 Freq Sensitivity: ± 0.8 dB
 Coupling: 6 ± 1.0 dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DUAL DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. DC4-6		
DATE: 11-25-2009		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 11-29-2009		
THIRD ANGLE PROJECTION		SIZE: A		
		REV: N/A		
		DWG NO. 84651		
DO NOT SCALE THE DRAWING				