


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

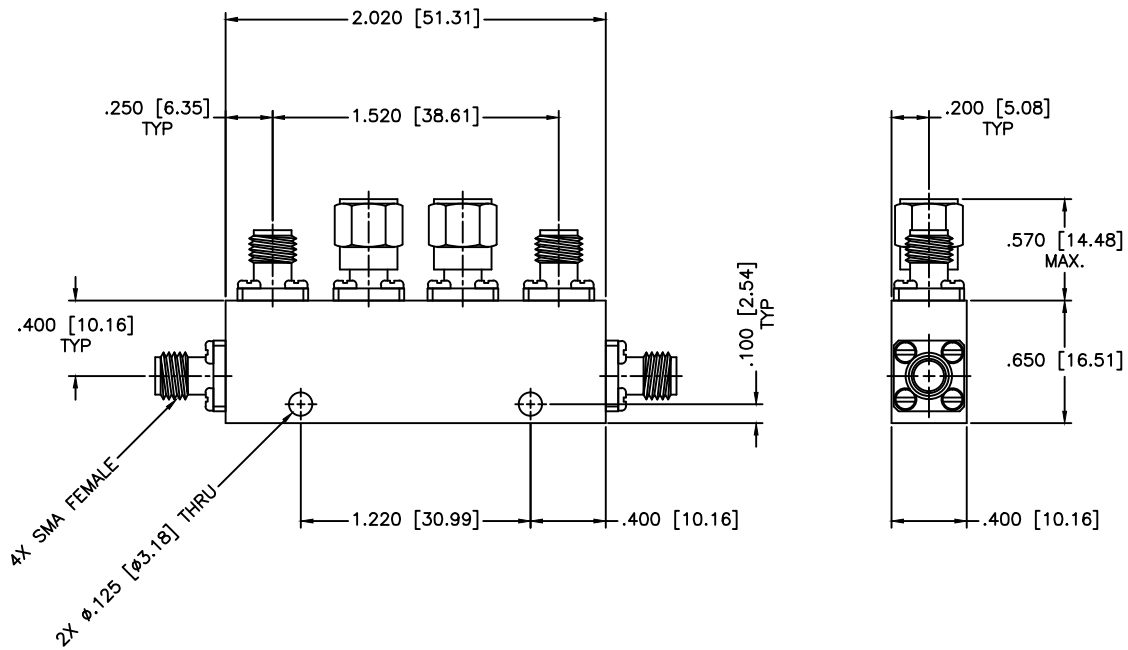

**SPECIFICATIONS**

Frequency Range: 7–12.4 GHz  
 VSWR: 1.35:1 Max.  
 Insertion loss: 1.9dB Max.  
 Directivity: 16dB Max.  
 Freq Sensitivity:  $\pm 0.6$ dB  
 Coupling:  $10 \pm 1.25$ dB

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: <b>DUAL DIRECTIONAL COUPLER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>DC6-10</b>		
DATE: 11-23-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 11-23-1997		
THIRD ANGLE PROJECTION		SIZE: A REV: N/A DWG NO. 80622		
		DO NOT SCALE THE DRAWING		