


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

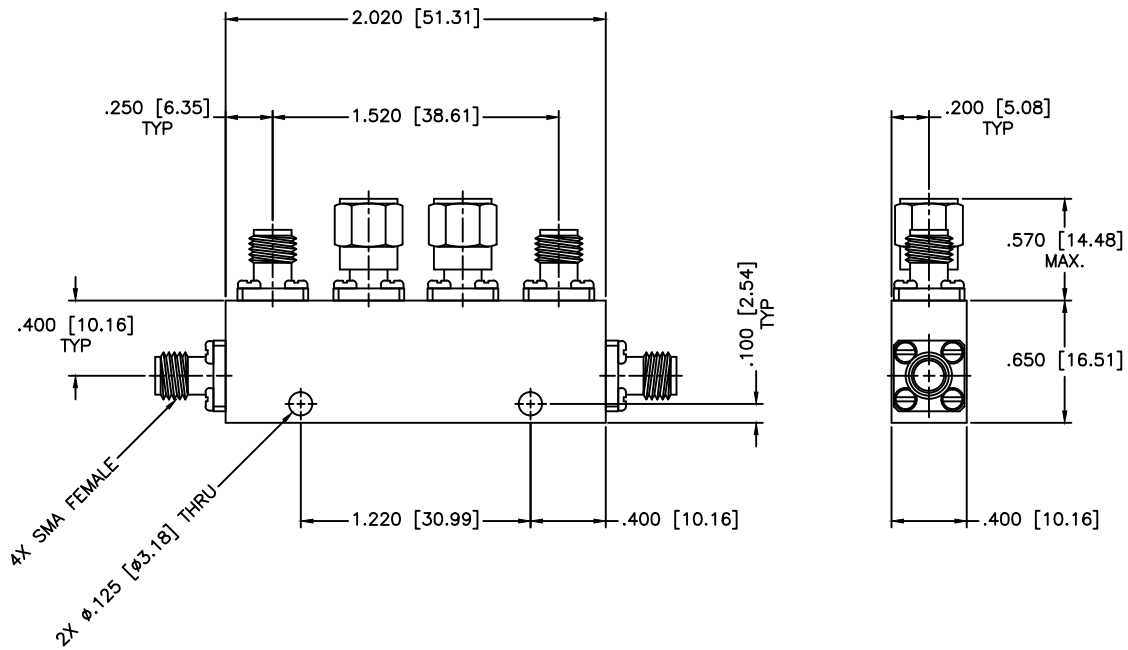

**SPECIFICATIONS**

Frequency Range: 8–16 GHz  
 VSWR: 1.40:1 Max.  
 Insertion loss: 2.2dB Max.  
 Directivity: 22dB Max.  
 Freq Sensitivity:  $\pm 0.8$ dB  
 Coupling:  $10 \pm 1.25$ dB

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: <b>DUAL DIRECTIONAL COUPLER</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: DC7-10	
DATE: 11-23-1997		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 11-23-1997	
<small>FREQUENTLY MISSED: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		SIZE: A	REV: N/A
		DWG NO.: 80625	
DO NOT SCALE THE DRAWING			