


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

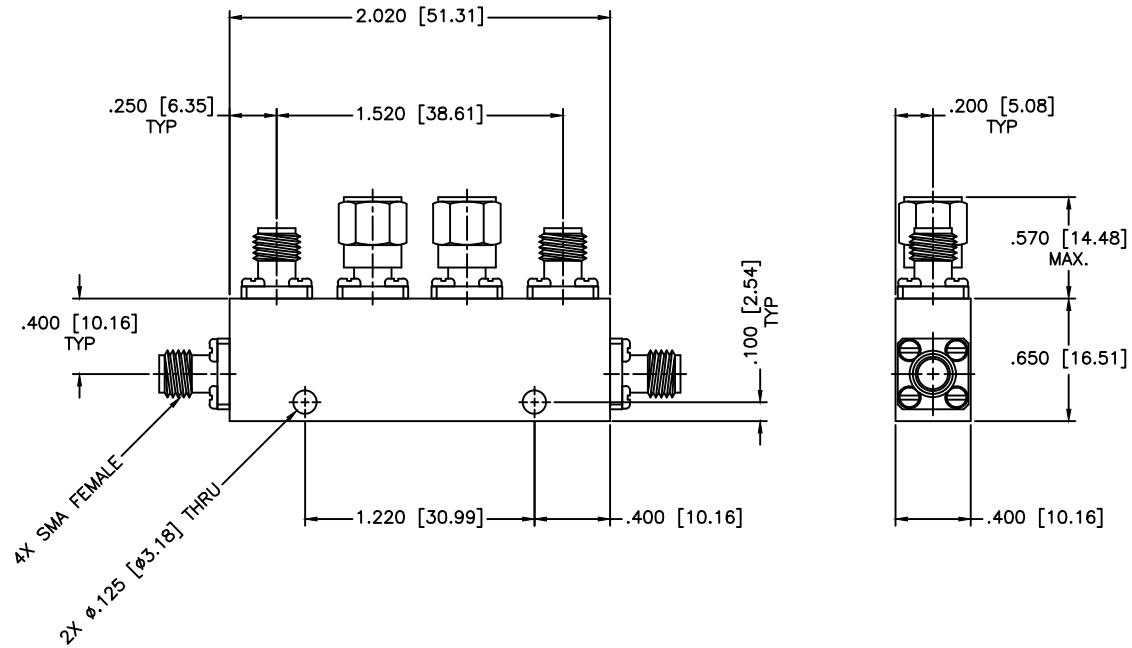

SPECIFICATIONS

Frequency Range: 8–16 GHz
 VSWR: 1.40:1 Max.
 Insertion loss: 1.0dB Max.
 Directivity: 22dB Max.
 Freq Sensitivity: ± 0.8 dB
 Coupling: 20 ± 1.25 dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		PART NO.: DC7-20	
DATE: 11-23-1997		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 11-23-1997	
THIRD ANGLE PROJECTION		SIZE: A	
		REV: N/A	
		DWG NO.: 80626	
DO NOT SCALE THE DRAWING			