


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

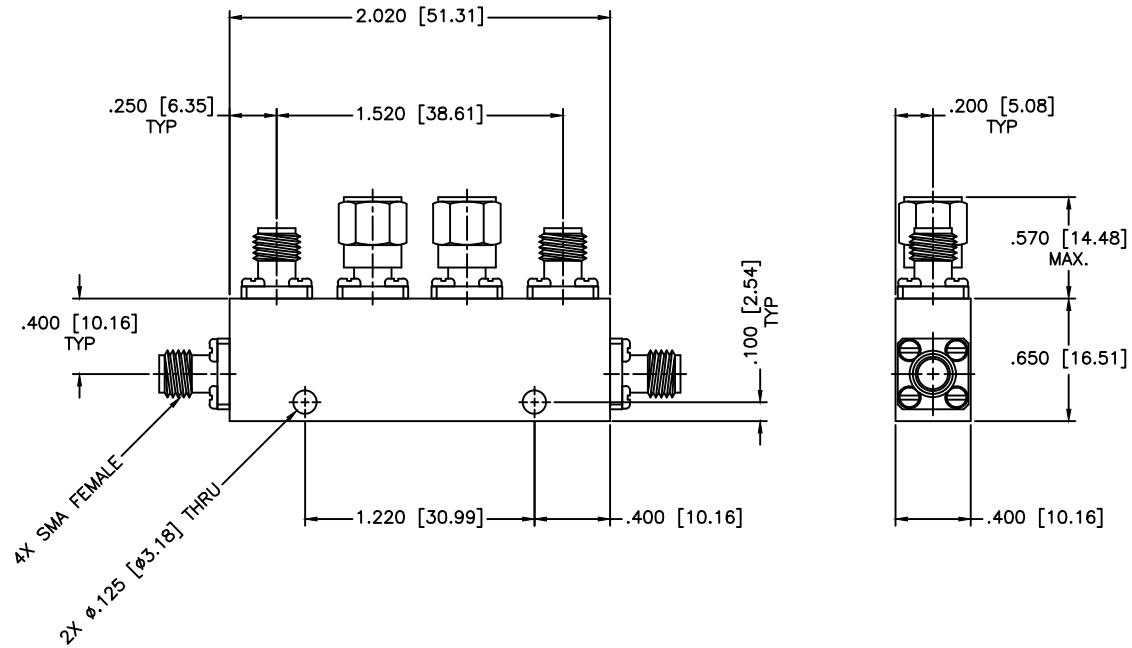

SPECIFICATIONS

Frequency Range: 12.4–18 GHz
 VSWR: 2.50:1 Max.
 Insertion loss: 1.0dB Max.
 Directivity: 17dB Max.
 Freq Sensitivity: ± 0.6 dB
 Coupling: 20 ± 1.0 dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DUAL DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. DC8-20		
DATE: 11-23-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 11-23-1997		
THIRD ANGLE PROJECTION		SIZE: A		
		REV: N/A		
		DWG. NO. 80628		
DO NOT SCALE THE DRAWING				