


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

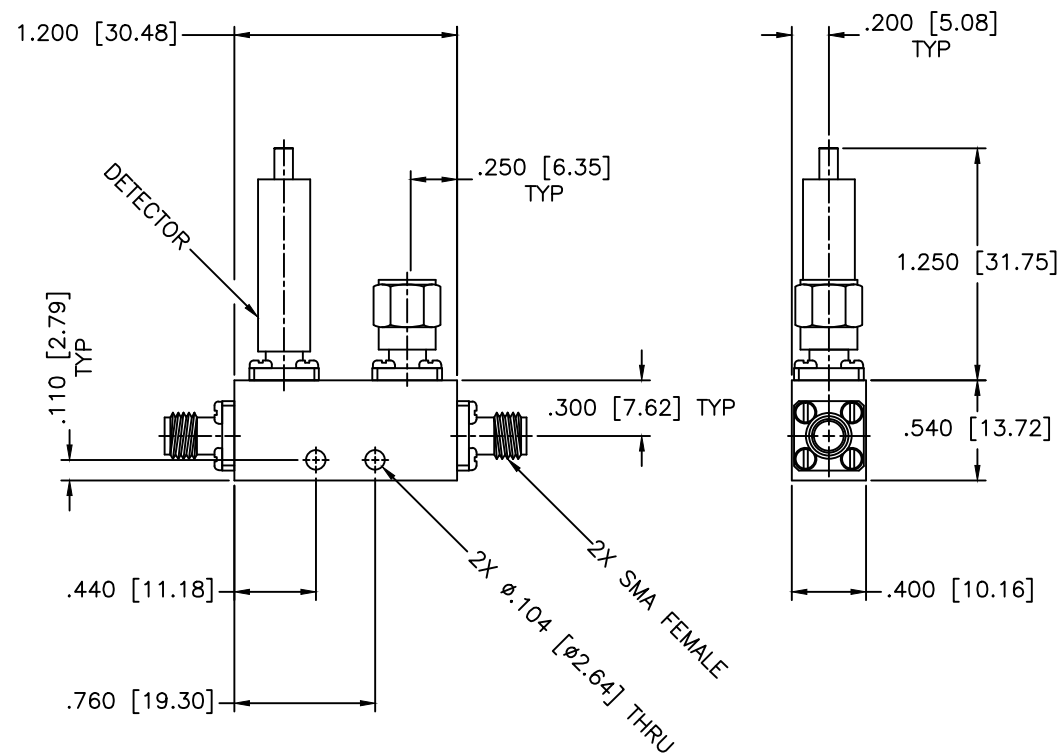

SPECIFICATIONS

Frequency Range: 2–4 GHz
 Directivity: 25dB Min.
 Sensitivity: 700 mV/mW Min.
 Insertion Loss: 0.9dB Max.
 Flatness: ± 0.2 dB
 VSWR: 1.15:1 Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DIRECTIONAL DETECTOR			
		PART NO. DD-3-X			
DRAWN: Paiboon Luekhamhan	DATE: 11-23-1997	CAGE CODE: OD2L5		SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 11-23-1997	DO NOT SCALE THE DRAWING		DWG NO. 80600	