


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

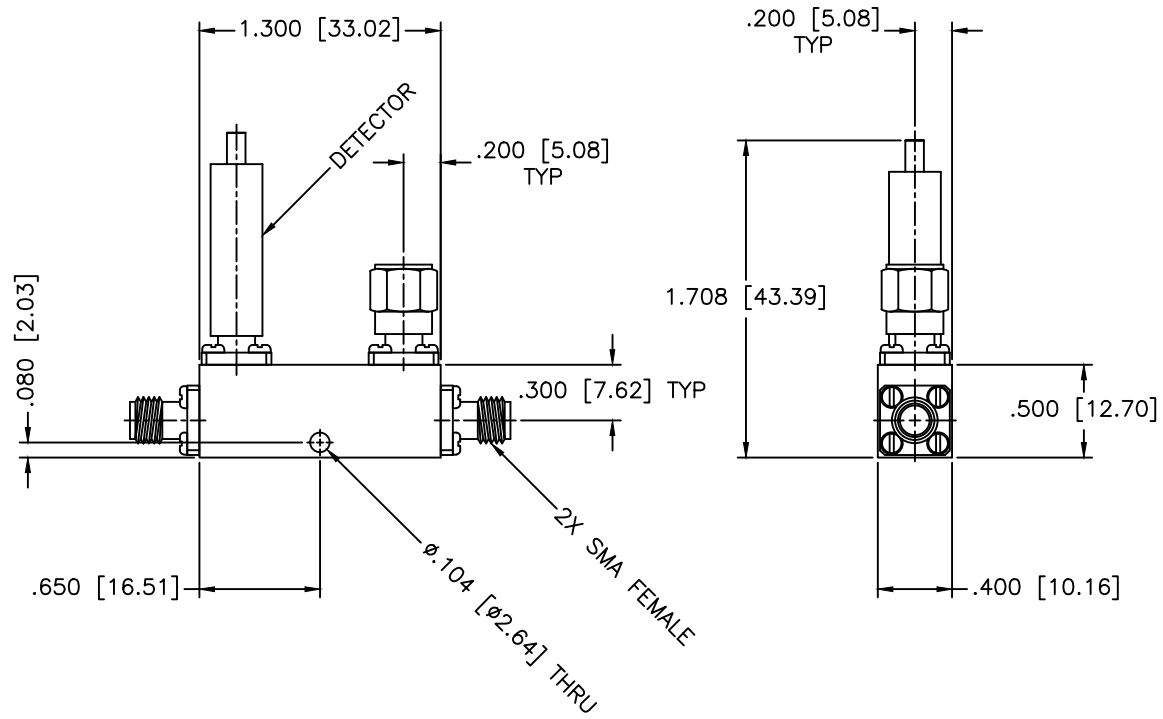

SPECIFICATIONS

- Frequency Range: 2–8 GHz
- Directivity: 20dB Min.
- Sensitivity: 500 mV/mW Min.
- Insertion Loss: 0.9dB Max.
- Flatness: ±0.3dB
- VSWR: 1.25:1 Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		DIRECTIONAL DETECTOR, NEGATIVE	
DRAWN:	DATE:	THIRD ANGLE PROJECTION 	CAGE CODE:		SIZE:	DWG NO.
APPROVED:	DATE:		OD2L5	A	B	80601
				DO NOT SCALE THE DRAWING		