


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

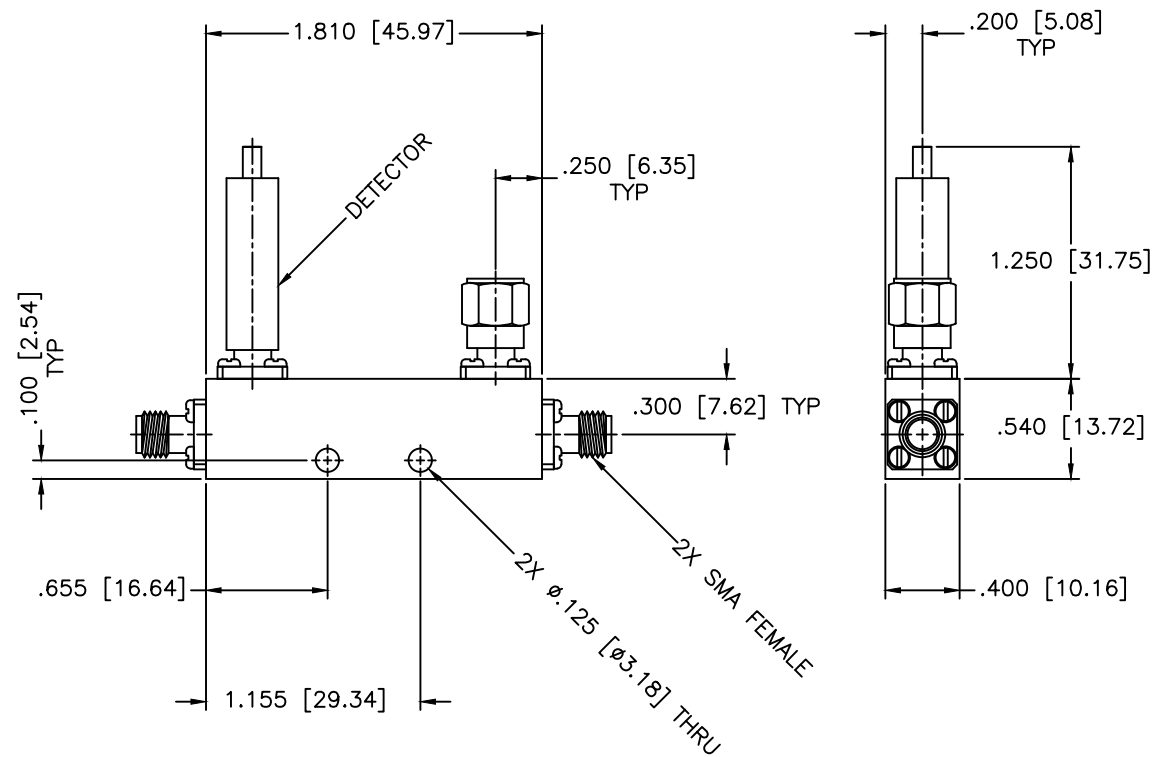

SPECIFICATIONS

Frequency Range: 7–12.4 GHz
 Directivity: 17dB Min.
 Sensitivity: 500 mV/mW Min.
 Insertion Loss: 1.0dB Max.
 Flatness: ± 0.4 dB
 VSWR: 1.30:1 Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DIRECTIONAL DETECTOR		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 11-23-1997		PART NO. DD-6-X
APPROVED: T. Nguyen		DATE: 11-23-1997		CAGE CODE: OD2L5
THIRD ANGLE PROJECTION		SIZE: A		REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 80603