


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

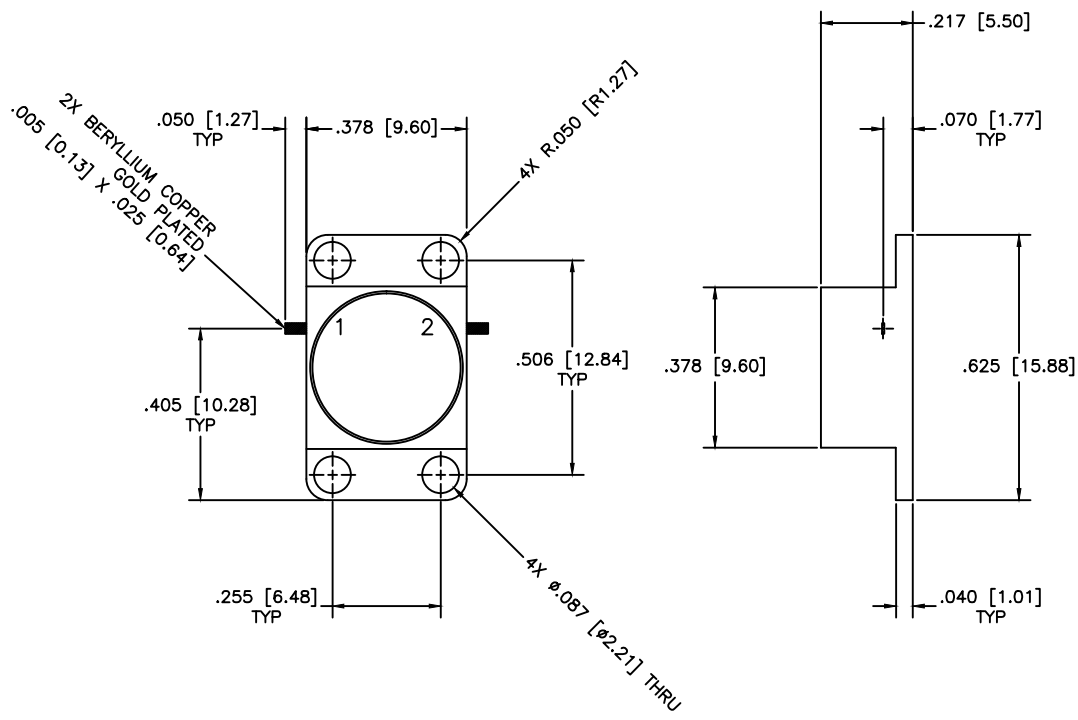

SPECIFICATIONS

Frequency Range: 6.0–6.7 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.6dB Max.
 VSWR: 1.33:1 Max.
 Operating Temperature: –30°C to +70°C
 Power: 1W Reverse

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:		
		DROP-IN ISOLATOR		
DRAWN:		PART NO.		
Paiboon Luekhamhan		DI-104		
DATE:		CAGE CODE:	SIZE:	REV:
03-12-2012		OD2L5	N/A	N/A
APPROVED:		DO NOT SCALE THE DRAWING		DWG NO.
T. Nguyen				86013
DATE:		THIRD ANGLE PROJECTION		
03-12-2012				