


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

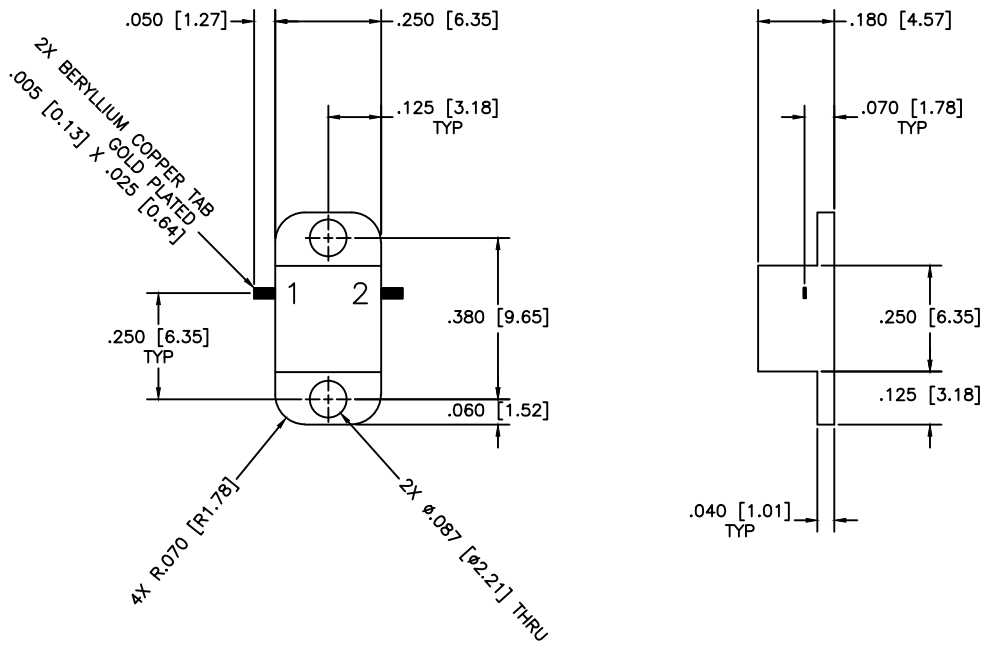

SPECIFICATIONS


Frequency Range: 18–21 GHz
 Isolation: 18dB Min.
 Insertion loss: 0.7dB Max.
 VSWR: 1.30:1 Max.
 Operating Temperature: –40°C to +85°C
 Power: 1W Reverse

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
DRAWN:		PART NO.		DIP-IN ISOLATOR		
DATE:		CAGE CODE:		DI-77		
APPROVED:		SIZE:		DO NOT SCALE THE DRAWING		
DATE:		REV:		DWG NO.		
T. Nguyen		OD2L5		85554		
02-21-2011		N/A		02-21-2011		
02-21-2011		N/A		02-21-2011		



UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)
 THIRD ANGLE PROJECTION



DRAWING TITLE:			
DIP-IN ISOLATOR			
PART NO.			
DI-77			
CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	N/A	85554
DO NOT SCALE THE DRAWING			