


MCLI MODEL NUMBER	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB Max.)	REVERSE ISOLATOR (dB Min.)	VSWR Max.	FWD/REV POWER (Watts)	TEMPERATURE RANGE (Deg. C)
DL-8	470-610	0.7	20	1.25:1	10/1	-40 to +70
DL-9	470-862	1.2	15	1.50:1	10/1	-40 to +80
DL-10	610-862	0.7	20	1.25:1	10/1	-40 to +80

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

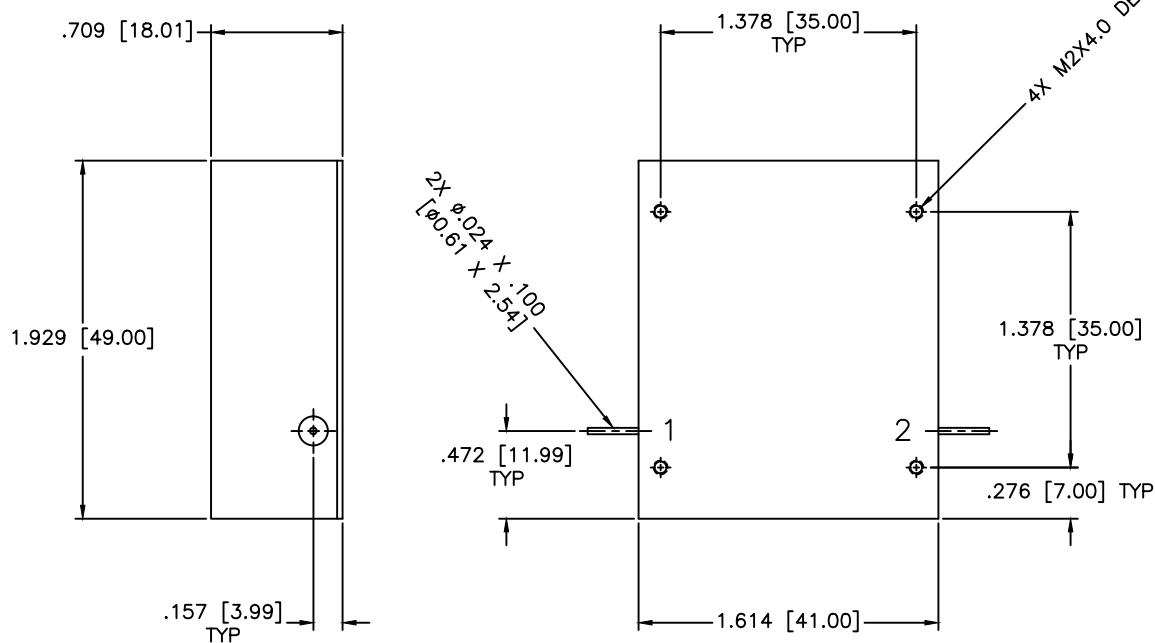

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: LUMPED ELEMENT COAXIAL ISOLATOR		
DRAWN: Paiboon Luekhamhan		PART NO. DL-8 to DL-10		
DATE: 08-03-2011		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 08-03-2011		SIZE: A REV: N/A DWG NO. 85799
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		