


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

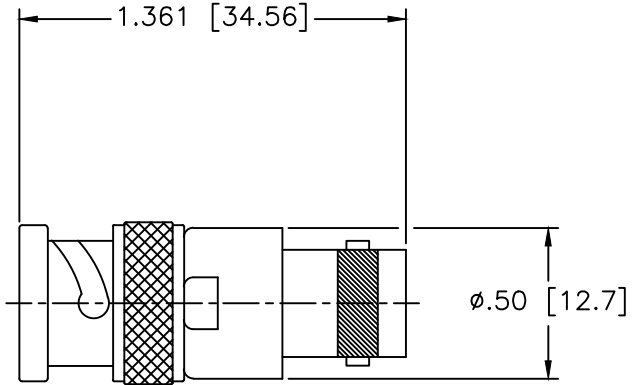

SPECIFICATIONS

FREQUENCY RANGE: DC-4 GHz
 STANDARD ATTENUATOR VALUES: 0, 3, 6, 10, 20 & 30dB
 ATTENUATION RANGE ACCURACY
 0-6dB ±0.3dB
 7-20dB ±0.5dB
 21-30dB ±0.75dB
 FREQUENCY RANGE VSWR:
 DC-1 GHz 1.10:1 Max.
 1-2 GHz 1.20:1 Max.
 2-4 GHz 1.35:1 Max.
 INPUT POWER: 2 Watts AVG.
 PEAK POWER: 250 Watts MAX.
 IMPEDANCE: 75 OHMS
 OPERATING TEMPERATURE RANGE: -65°C to +125°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
DRAWING TITLE: BNC ATTENUATORS		PART NO. FAB-1-X-75	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.040 ANGLE: ±1/2°	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5 SIZE: A REV: A DWG NO. 82534	
DRAWN: Paiboon Luekhamhan DATE: 07-18-2006	APPROVED: T. Nguyen DATE: 07-18-2006	DO NOT SCALE THE DRAWING	

