


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

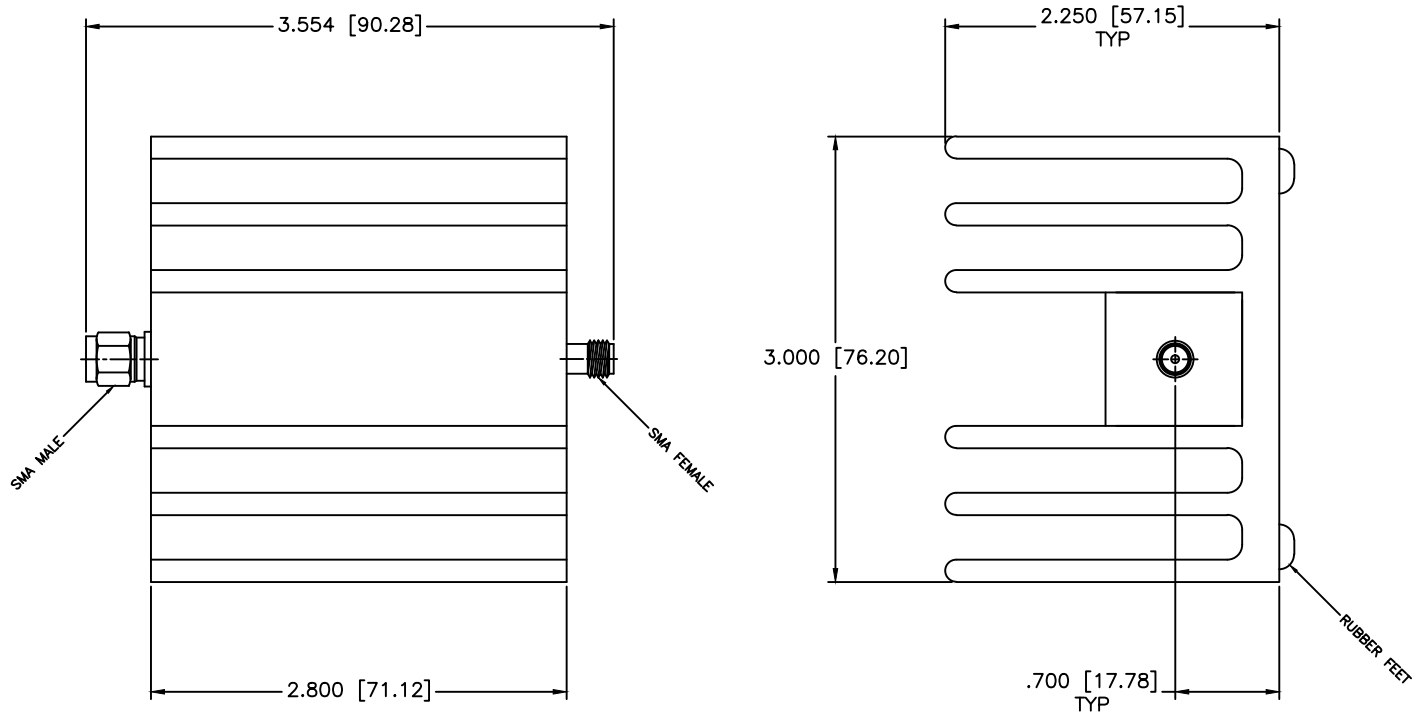

**SPECIFICATIONS**

- Frequency Range: DC–2.5 GHz
- VSWR: 1.35:1 Max.
- Attenuation Value: 3dB to 30dB
- Attenuation Accuracy: 3% W.I.G.
- Operating Temperature: –65°C to +125°C
- Impedance: 50 ohms
- Mechanical
- SMA Connectors: Passivated Stainless Steel
- Conductors: Gold Plated Beryllium Copper
- Housing: Anodized Aluminum

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN: Paiboon Luexhamhan		DATE: 02-27-2004	DRAWING TITLE: SMA ATTENUATOR, 10 WATTS	
			PART NO. FAS-14	
APPROVED: T. Nguyen		DATE: 02-27-2004	CAGE CODE:	OD2L5
			SIZE:	N/A
			REV:	N/A
			DWG NO. 82298	
			DO NOT SCALE THE DRAWING	

UNLESS OTHERWISE SPECIFIED:  
TOLERANCES  
IN (INCHES) OR [mm] (MILLIMETERS)  
FRACTIONS: ± 1/64  
DECIMALS: ±.05 ±.025  
ANGLE: ±1/2°

PROPRIETARY NOTICE:  
THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
PERMISSION FROM MICROWAVE COMMUNICATIONS  
LABORATORIES INC. (MCLI)

