


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

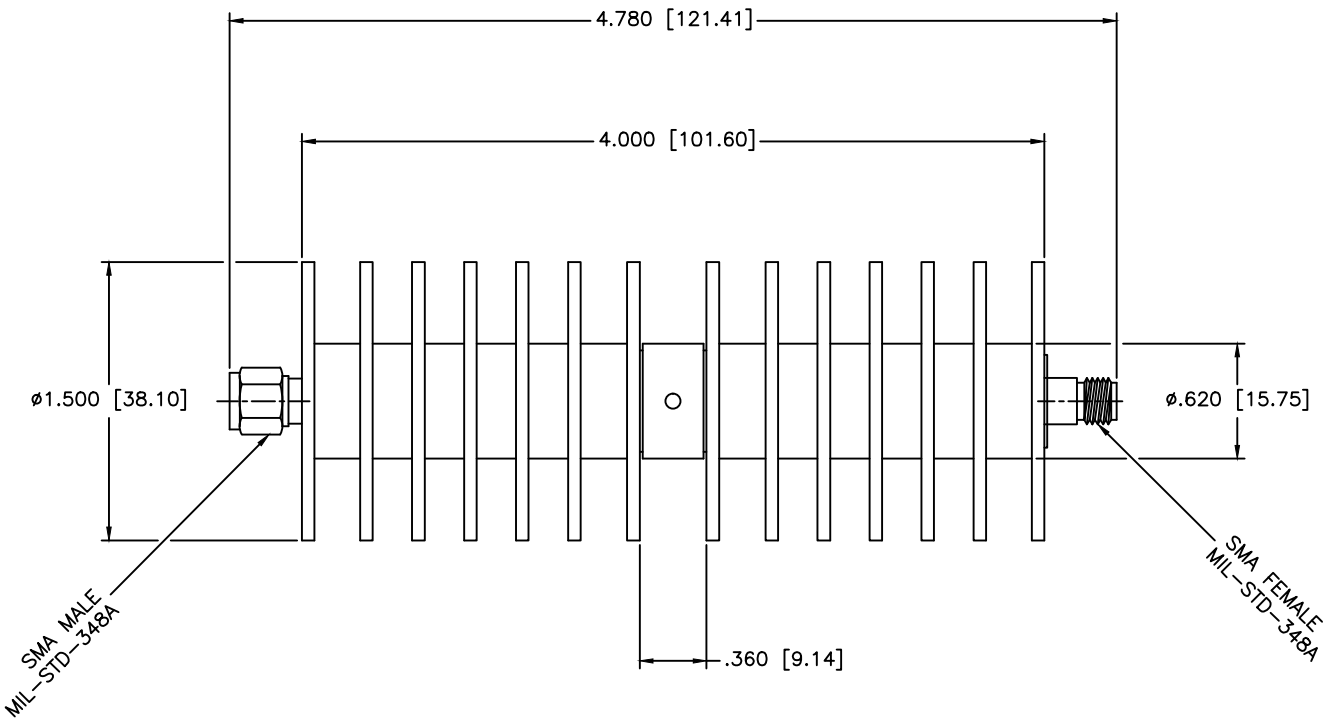

SPECIFICATIONS

Frequency Range: DC-18 GHz
 Impedance: 50 Ohms
 Attenuation (dB): 3, 6, 10, 15, 20, 30 and 40dB
 Attenuation Accuracy: ±1.5dB
 VSWR: 1.35:1 Max.
 Input Power, CW: 50 Watts
 Rated at +25°C, derate linearly to 5W at +125°C
 Input Power, Peak: 50 kWatts
 5us pulse, 2.5% duty cycle
 Operating Temperature Range: -55°C to +125°C
 Electrical Specification Value at +25°C, sea level

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-15-2019
APPROVED: T. Nguyen	DATE: 11-15-2019

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.025 ±.015 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 50 WATTS COAXIAL ATTENUATOR, SMA		PART NO.	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		FAS-24-dB	
CAGE CODE: OD2L5	SIZE: A	REV: A	DWG NO. 86821
DO NOT SCALE THE DRAWING			

