


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

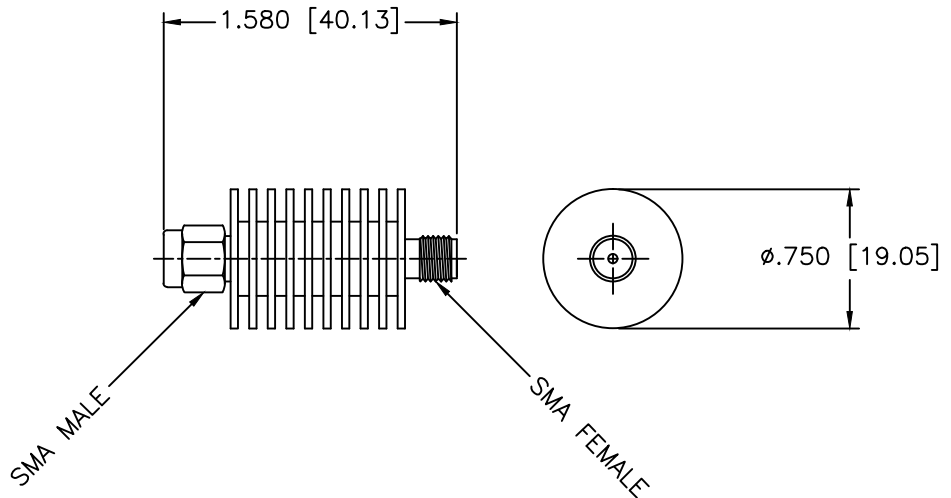

SPECIFICATIONS

Frequency Range: DC-4 GHz  
 VSWR: 1.15:1 Max.  
 Power @ 25°C: 5 Watts  
 Attenuation Accuracy: 30dB ±0.75dB  
 Operating Temperature: -55°C to +85°C  
 Impedance: 50 ohms

Mechanical

N Connectors: Passivated Stainless Steel  
 Conductors: Gold Plated Beryllium Copper  
 Housing: Aluminum

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	COAXIAL ATTENUATOR	
DRAWN:		DATE:		PART NO.			FAS-5
Paiboon Luexhamhan 12-07-1997		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE:	REV:	DWG NO.
APPROVED:		DATE:		OD2L5	A	N/A	80786
T. Nguyen		12-07-1997		DO NOT SCALE THE DRAWING			

