


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

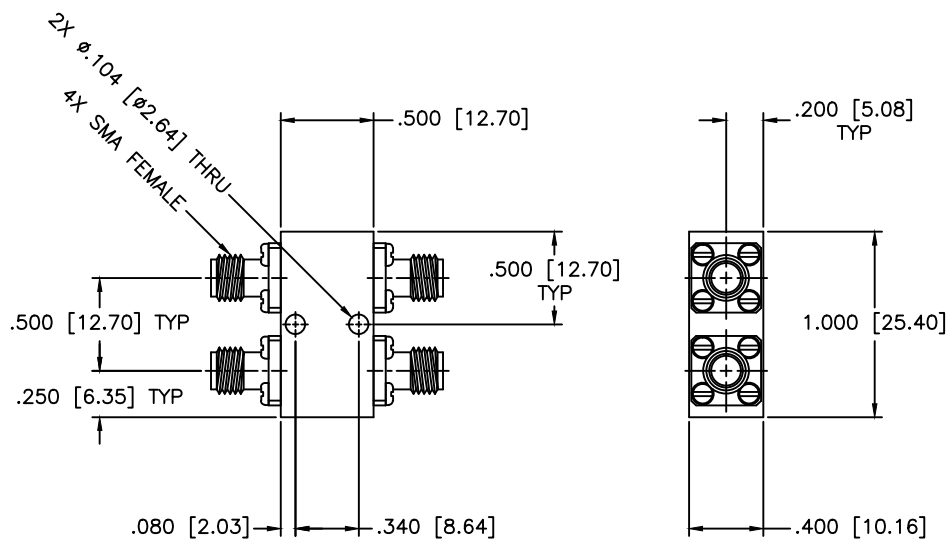

SPECIFICATIONS

Frequency Range: 19.6–26.5 GHz
 Coupling: 3.3±0.5dB
 Frequency Sensitivity: ±0.5 dB
 Isolation: 14dB Min.
 VSWR: 1.50:1 Max.
 Average Power: 10W, 3kW Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		90° HYBRID	
DRAWN:		DATE:		PART NO.		DWG NO.
Paiboon Luekhamhan		12-04-1997		HB-31		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		12-04-1997		OD2L5	A	A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		80697
		THIRD ANGLE PROJECTION				