


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

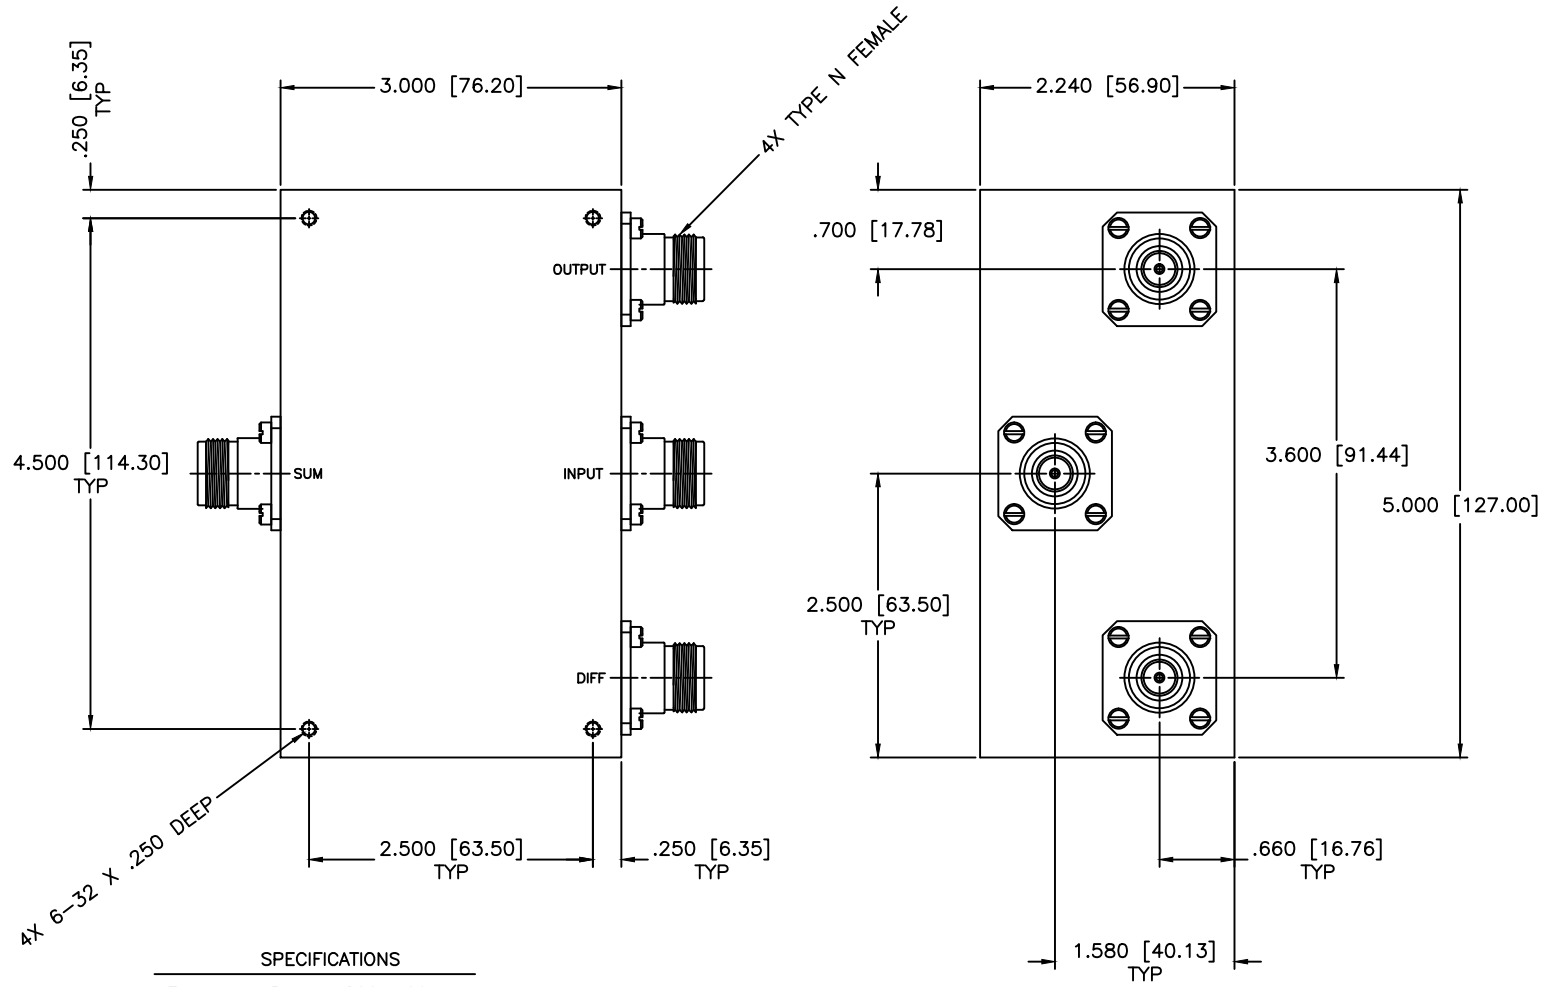

**SPECIFICATIONS**

Frequency Range: 200–400 MHz  
 Insertion Loss: 0.2dB Max.  
 Isolation: 20dB Min.  
 VSWR: 1.40:1 Max.  
 Power: 400Watts CW  
 Amplitude Balance: 0.2dB Max.  
 Phase Balance: 180±5 Deg. Max.

<b>MATERIAL:</b>	<b>MCLLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.mclli.com	SCALE:	N/A
		SHEET:	N/A
<b>DRAWN:</b> Paiboon Luakhomhan	<b>DATE:</b> 03-27-2013	<b>DRAWING TITLE:</b> 2-WAY 180° COMBINER/DIVIDER	
		<b>PART NO.:</b> HCD-22	
<b>APPROVED:</b> T. Nguyen	<b>DATE:</b> 03-27-2013	<b>CAGE CODE:</b> OD2L5	<b>DWG NO.:</b> 86258
<small>UNLESS OTHERWISE SPECIFIED:          TOLERANCES          IN (INCHES) OR (MILLIMETERS)          FRACTIONS: ± 1/64          DECIMALS: ± .01 ± .005          ANGLE: ± 1/2°</small>		<small>DO NOT SCALE THE DRAWING</small>	