


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

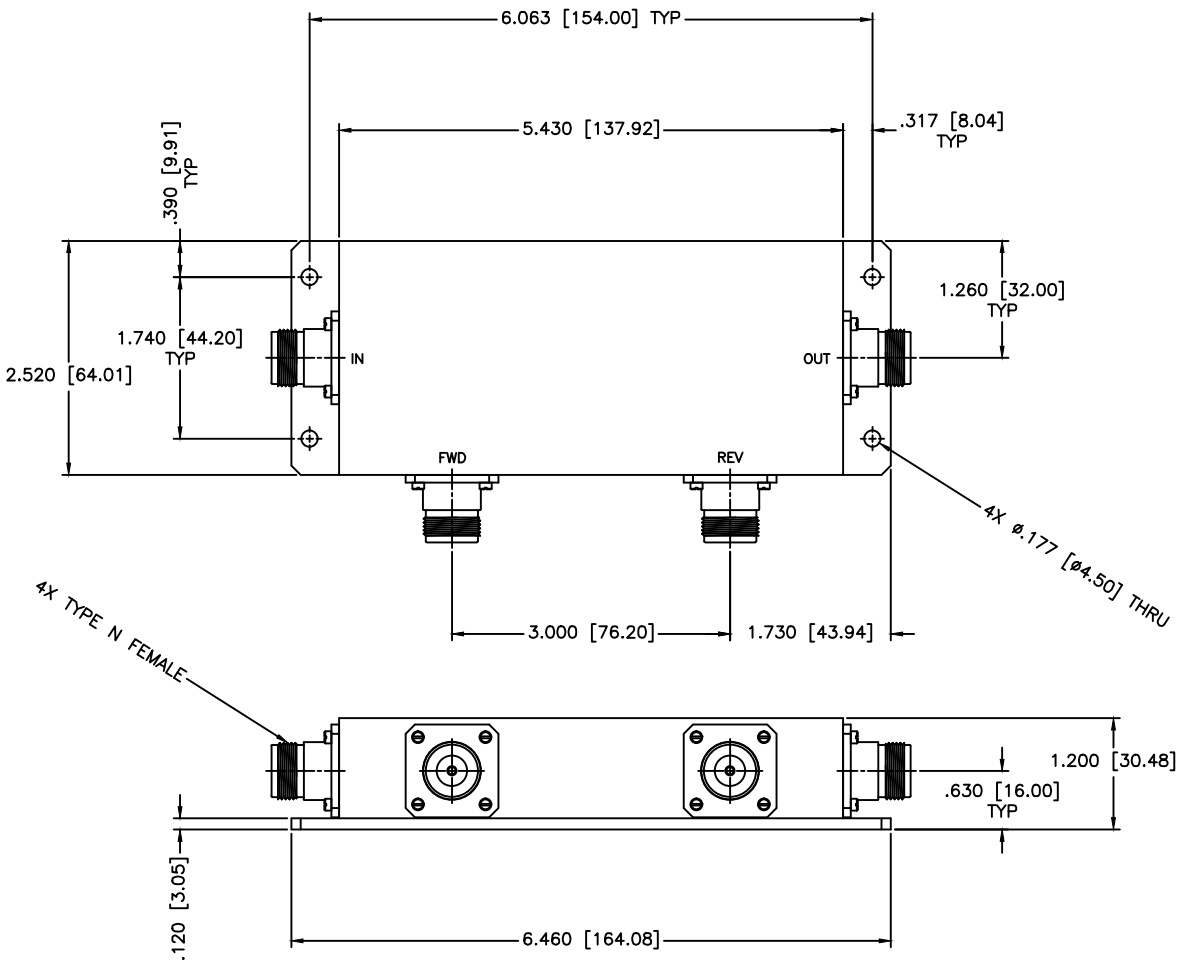

SPECIFICATIONS

FREQUENCY RANGE: 0.5–32 MHz
 FREQUENCY SENSITIVITY: ±0.30dB
 INSERTION LOSS: 0.30dB Max.
 DIRECTIVITY: 25dB Min.
 VSWR PRIME LINE: 1.05:1 Max.
 POWER: 1500 Watts

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER		
PART NO.:		HDL-14-30		
DRAWN:	DATE:	<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°</small>	CAGE CODE:	SIZE:
PAIBOON LUEKHAMHAN	03-27-1999		OD2L5	C
APPROVED:	DATE:	<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	REV:	DWG NO.:
T. NGUYEN	03-27-1999		N/A	81251
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		