
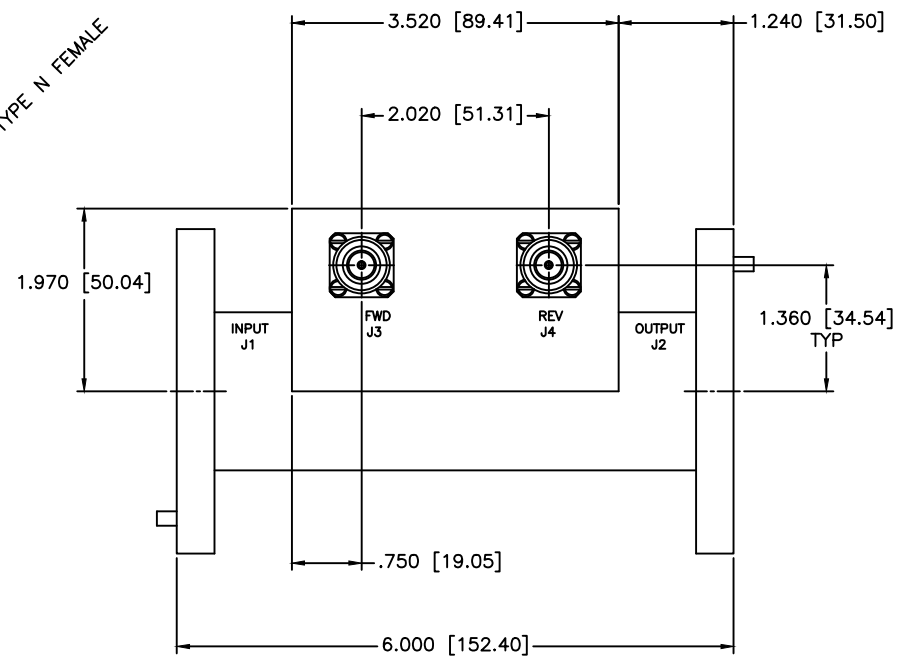


4 | 3 | 2 | 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

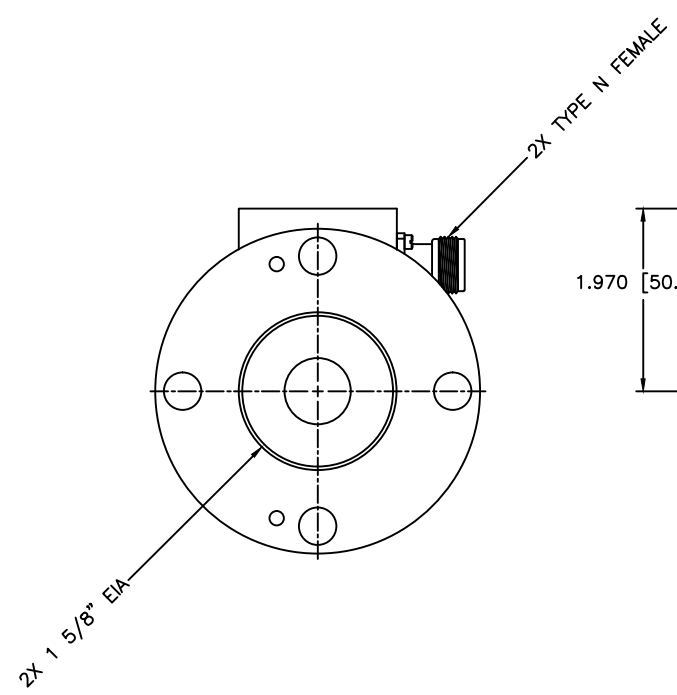

SPECIFICATIONS

FREQUENCY RANGE: 100-1000 MHz
 FLATNESS: $\pm 0.60\text{dB}$
 INSERTION LOSS: 0.15dB Max.
 DIRECTIVITY: 30dB Min.
 VSWR: 1.30:1 Max.
 POWER: 8kW CW

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan DATE: 01-05-2011		PART NO.: HDL-24-70/8K		
APPROVED: T. Nguyen DATE: 01-05-2011		CAGE CODE: OD2L5	SIZE: C DO NOT SCALE THE DRAWING	REV: N/A DWG NO.: 85195

4 | 3 | 2 | 1