


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

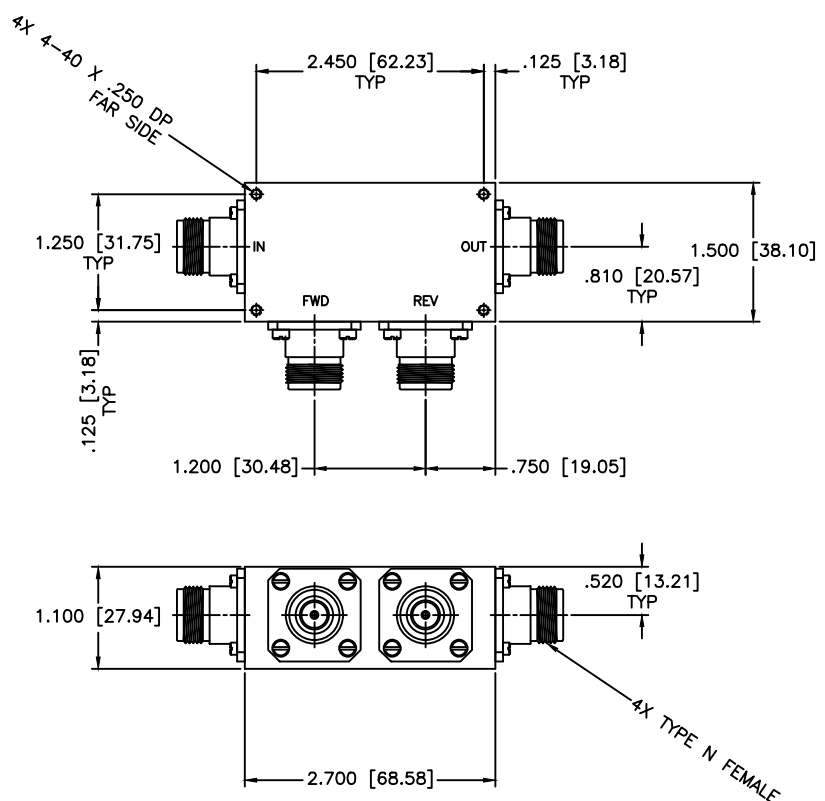

SPECIFICATIONS

- FREQUENCY RANGE: 1-500 MHz
- COUPLING: 30dB
- FLATNESS: ± 1.0 dB
- INSERTION LOSS: 0.8dB Max.
- DIRECTIVITY: 20dB Min.
- VSWR PRIME LINE: 1.20:1 Max.
- POWER: 100W CW

MATERIAL:		<p>MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM</p>	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER		
PART NO.:		HDL-27-30		
DRAWN:	DATE:	<small>PROPERTY NOTICE:</small> <small>THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	CAGE CODE:	SIZE:
APPROVED:	DATE:		OD2L5	C
		DO NOT SCALE THE DRAWING		DWG NO.:
				85173