
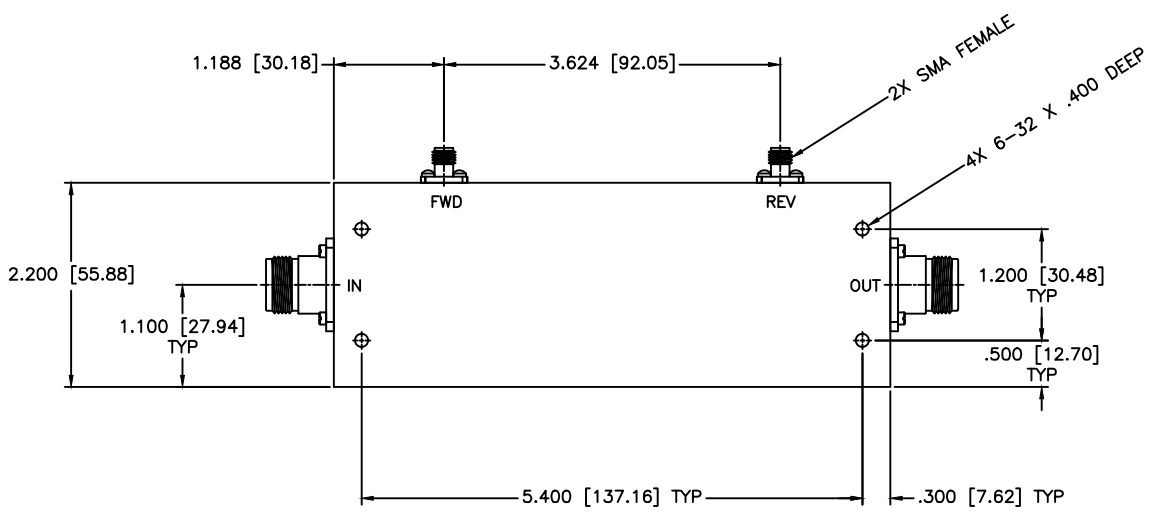


4 | 3 | 2 | 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

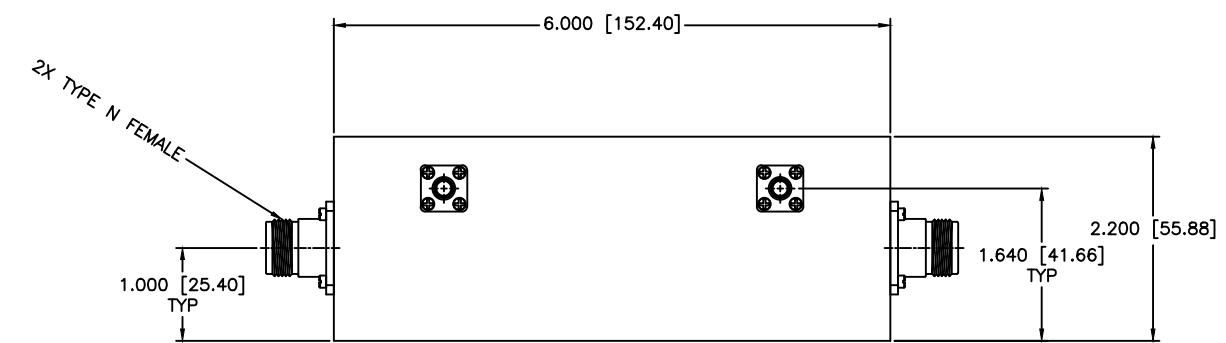

**SPECIFICATIONS**

- FREQUENCY RANGE: 1-500 MHz
- COUPLING: 40±1.0dB Nom.
- FLATNESS: ±0.5dB Max.
- INSERTION LOSS: 0.30dB Max.
- DIRECTIVITY: 20dB Min.
- VSWR: 1.20:1 Max.
- POWER: 1,000W CW

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>HIGH POWER DUAL DIRECTIONAL COUPLER</b>	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: <b>HDL-27-40</b>	
DRAWN:	DATE:	THIRD ANGLE PROJECTION	CAGE CODE:	SIZE:
Pai boon Luekhamhan	09-13-2006		OD2L5	C
APPROVED:	DATE:		DWG NO.:	
T. Nguyen	09-13-2006		82657	
			DO NOT SCALE THE DRAWING	

4 | 3 | 2 | 1

D  
C  
B  
A

D  
C  
B  
A