


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

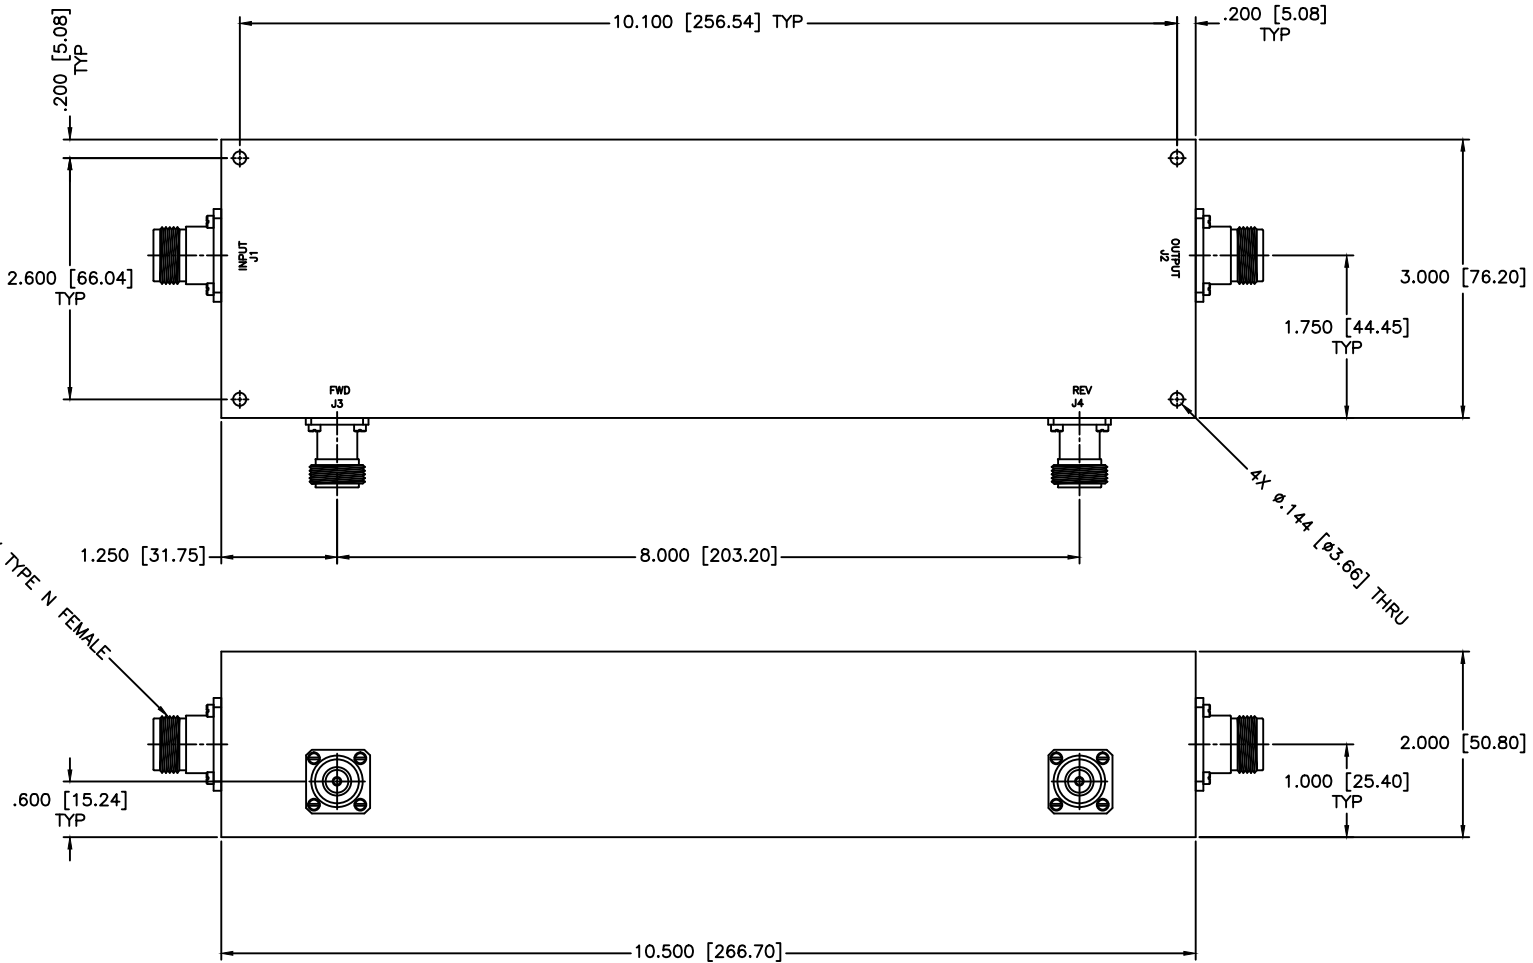

SPECIFICATIONS

FREQUENCY RANGE: 0.01–250 MHz
 FLATNESS: ± 0.75 dB Max.
 INSERTION LOSS: 0.40dB Max.
 DIRECTIVITY: 20dB Min.
 VSWR: 1.25:1 Max.
 POWER: 500 Watts CW

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
			SHEET: N/A
DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER	
PART NO.:		HDL-3-40/500	
DRAWN:	DATE:	<small>PROPRIETARY NOTICE:</small> THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DWG NO. 81224
Paiboon Luekhamhan	02-27-2008		
APPROVED:	DATE:	CAGE CODE: OD2L5	SIZE: C
T. Nguyen	02-27-2008	REV: N/A	DO NOT SCALE THE DRAWING

