


4 3 2 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

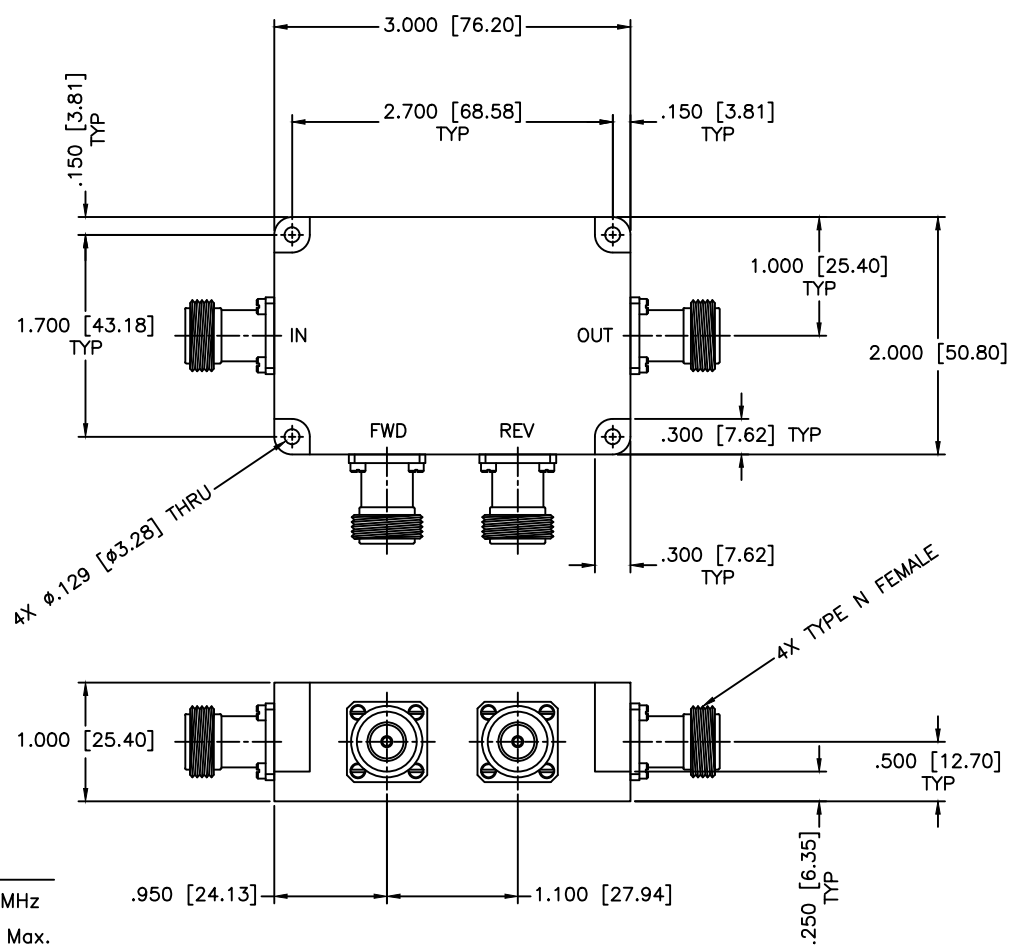

SPECIFICATIONS
FREQUENCY RANGE: 20–1000 MHz
COUPLING: 30±1.0dB Max.
FLATNESS: ±0.5dB Max.
INSERTION LOSS: 0.70dB Max.
DIRECTIVITY: 20dB Min.
VSWR (ML): 1.10:1 Max.
POWER: 50W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		4-PORT DUAL DIRECTIONAL COUPLER		
PART NO.		HDL-68-3050/NF		
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	N/A	N/A	87205	
DO NOT SCALE THE DRAWING				

DRAWN:	DATE:	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)
Paiboon	05-23-2024	
APPROVED:	DATE:	THIRD ANGLE PROJECTION
P. Nguyen	05-23-2024	