



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

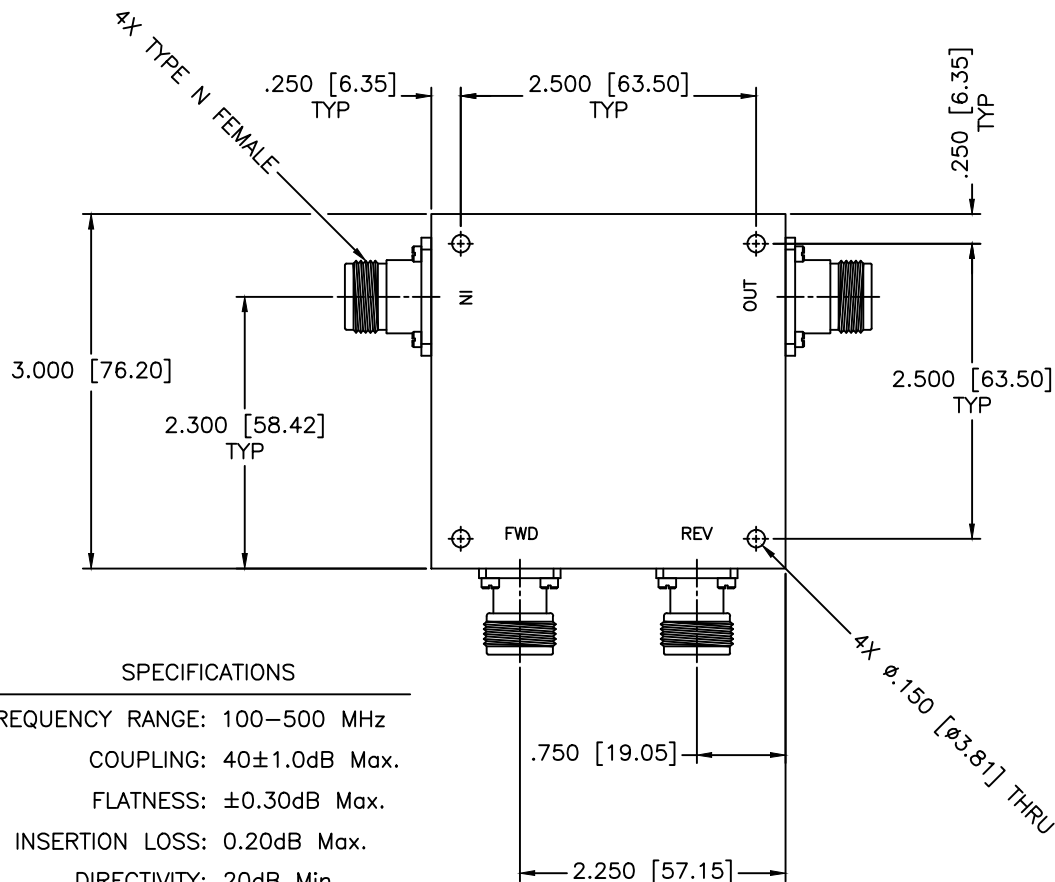

SPECIFICATIONS

FREQUENCY RANGE: 100–500 MHz
 COUPLING: 40 ± 1.0 dB Max.
 FLATNESS: ± 0.30 dB Max.
 INSERTION LOSS: 0.20 dB Max.
 DIRECTIVITY: 20 dB Min.
 VSWR (ML): 1.20:1 Max.
 POWER: 2,000W CW

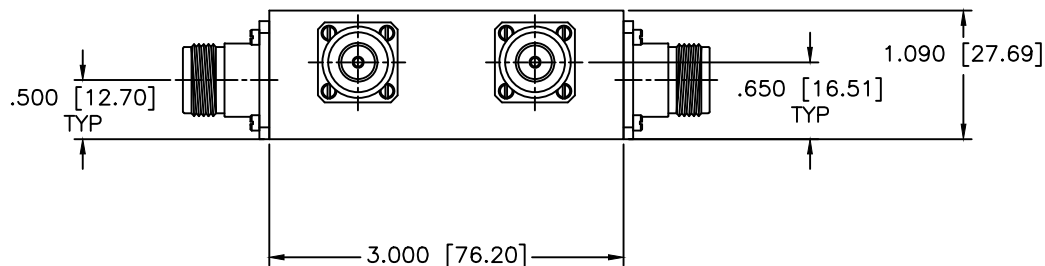

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
					SHEET:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:				4-PORT DUAL DIRECTIONAL COUPLER	
		PART NO.				HDL-7-402K	
DRAWN: Paiboon DATE: 05-28-2024		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE:	REV:	DWG NO.
APPROVED: T. Nguyen DATE: 05-28-2024		THIRD ANGLE PROJECTION 		OD2L5	N/A	N/A	87210
DO NOT SCALE THE DRAWING							